
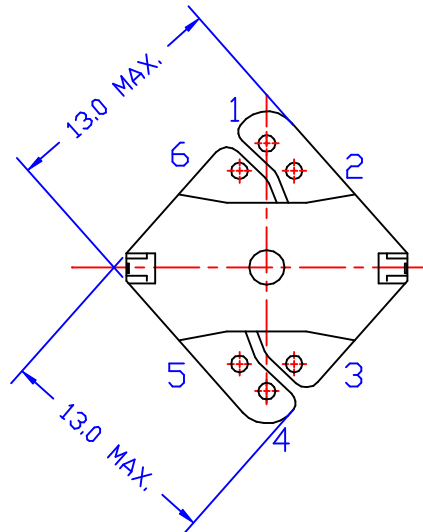
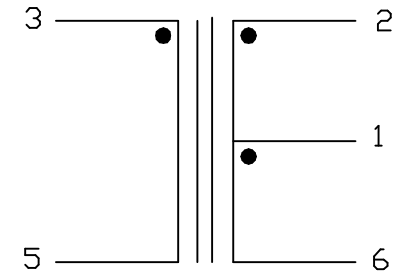
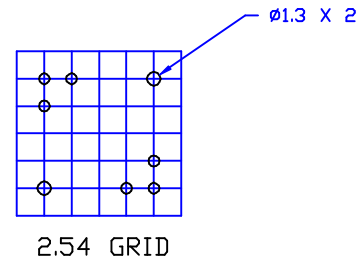


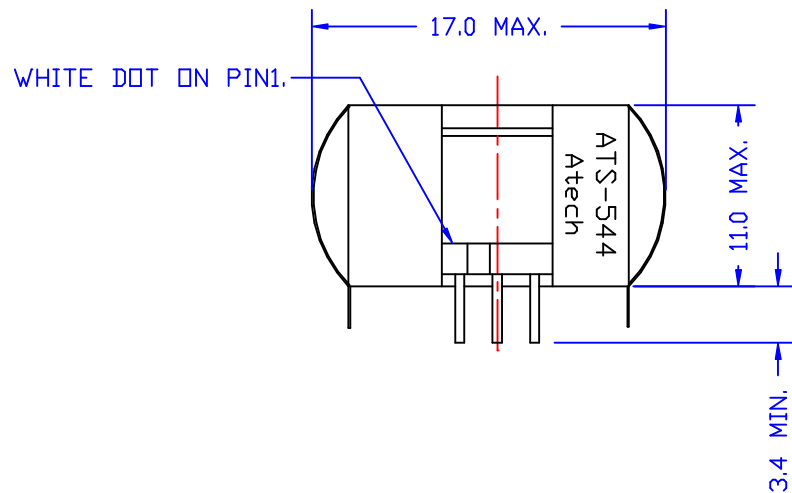

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 3-5 = 0.24 Ω $\pm$ 12%
PIN 2-1 = 1-6 = 0.77 Ω $\pm$ 12%
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 2-6 = 943 μ H $\pm$ 5%
3. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-3 = 25 pF MAX.
4. TURN RATIO (@2MHZ, 1Vrms) : PIN 2-6 : 3-5 = 5.06 $\pm$ 1%
5. HI-POT (@1000VAC, 1mA, 2SEC) : PIN 6-3

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE
							TRANSFORMER
							DWG. NO.
							ATS-544
	RELEASE	09/13/2001	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY
						M/M	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						09/13/01	SHEET 1 OF 1
							DRAW
							<i>Pair</i>