
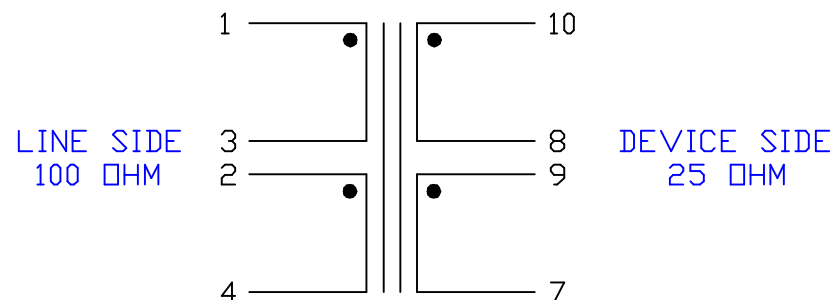
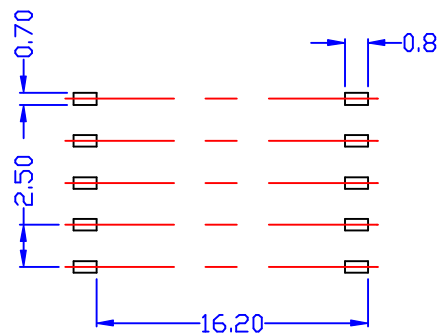
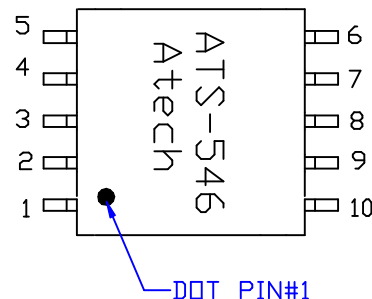
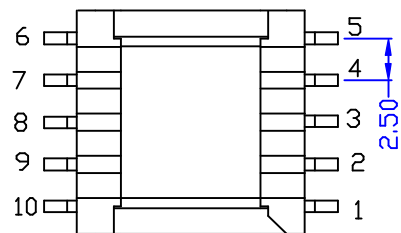



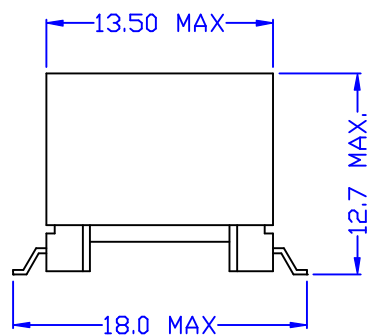

ELECTRICAL CHARACTERISTICS : <FOR C2163 COMPATIBLE>

1. D.C.R. : PIN 1-3 = 2-4 = 0.8 OHM MAX.
PIN 9-7 = 0.3 OHM MAX.
PIN 10-8 = 0.25 OHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 1mH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3 8-9 10-7 SHORT) = 5.5uH MAX.
4. INSERTION LOSS : (@100KHz) = 0.5dB MAX.
5. FREQUENCY RESPONSE (@REF 100KHz) : (<@30KHz) = $\pm$ 0.5dB
(<@1.1MHz) = $\pm$ 0.5dB
6. TURN RATIO (@600KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : 10-7 (9-8 SHORT) = 2 $\pm$ 1%
7. HI-POT (@1875VAC, 0.5mA, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-546	
	RELEASE	09/05/2001	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/05/01			
REVISIONS								DRAW	Pair