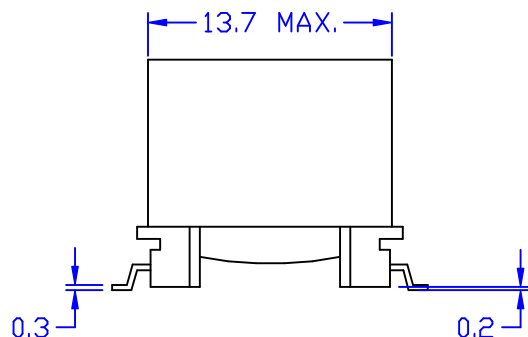
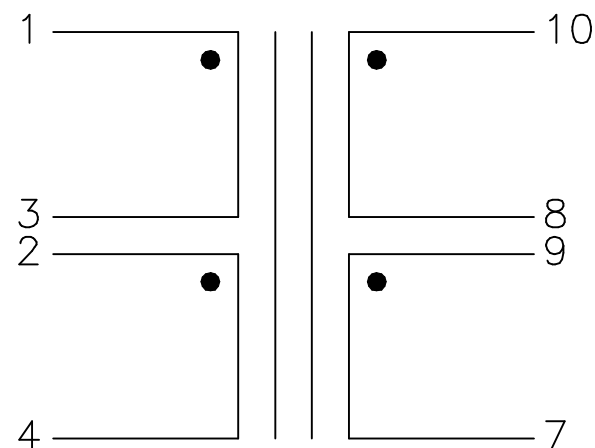
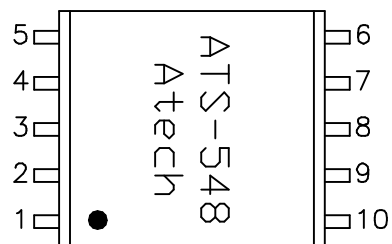


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = $0.45 \Omega \pm 12\%$
PIN 10-8 = 9-7 = $0.97 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 SHORT) = $475\mu\text{H} \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3, 8-9, 10-7 SHORT) = $8\mu\text{H} \text{ MAX.}$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-3, 8-9 SHORT) = $50\text{pF} \text{ MAX.}$
- TURN RATIO (@15KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 10-7 (8-9 SHORT) = $1.15 \pm 1\%$
- HI-POT (@1875VAC, 500uA, 1SEC) : PIN 1-10 (2-3, 8-9 SHORT)

						Atech®		TITLE ADSL
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								ATS-548
RELEASE		09/25/2001	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	DRAW	Pair
						09/25/01		