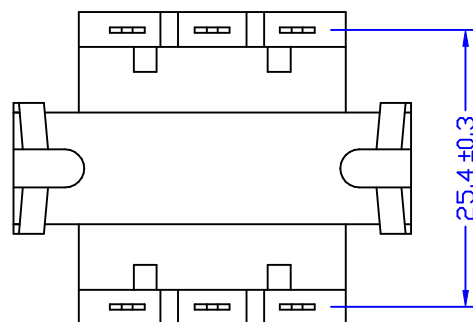
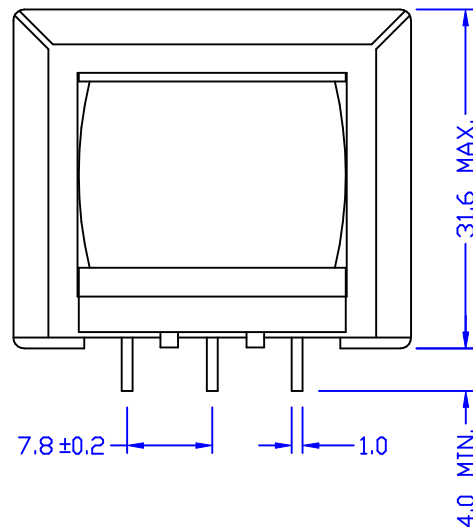
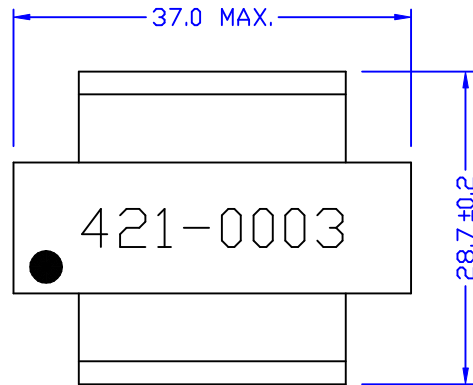


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-6 = 3-4 = 66 OHM $\pm$ 12%
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 = 5.3H MIN.
- INSERTION LOSS (@1KHZ, 0dBm) : PIN 3-4 = 600 OHM
PIN 1-6 = 1.2dB MAX.
- FREQ. RESP (@REF 1KHZ) : (@20HZ) = $\pm$ 0.25dB
(@20KHZ) = $\pm$ 0.1dB
- TURN RATIO (@30KHZ, 1Vrms) : PIN 1-6 : 3-4 = 1 $\pm$ 1%
- THD (@1KHZ, -10dBm) : PIN 1-6 = 80dB MAX.
- HI-POT (@500VDC, 0.5mA, 2SEC) : PIN 1-3
- RoHS COMPLIANT.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE 700 : 600 TRANSFORMER	
								DWG. NO. ATS-551R	
	RELEASE	01/18/2006	BART		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						01/18/06			