
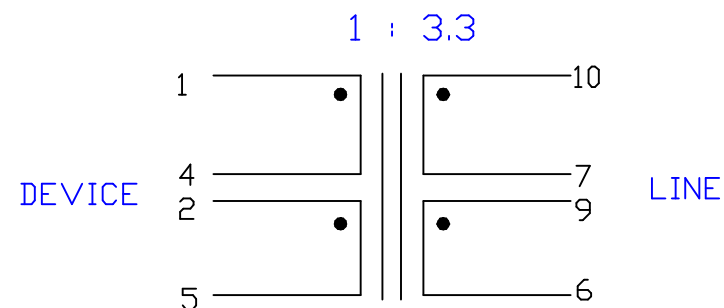
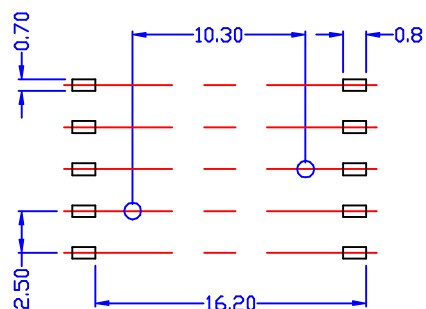
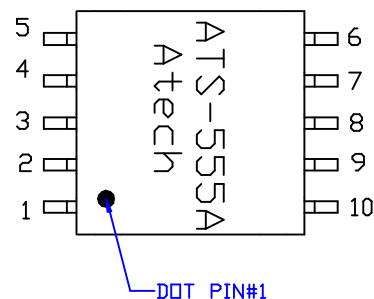
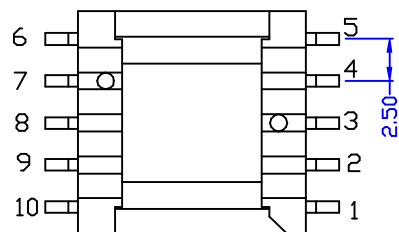



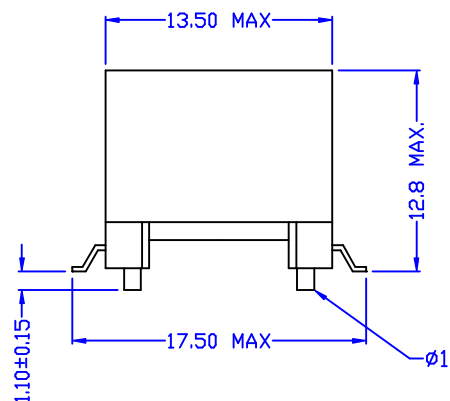

ELECTRICAL CHARACTERISTICS : <FOR 51130 COMPATIBLE>

1. D.C.R. : PIN 4-1 = 0.268 OHM $\pm$ 12%
PIN 2-5 = 0.2 OHM $\pm$ 12%
PIN 6-9 = 7-10 = 0.723 OHM $\pm$ 12%
2. INDUCTANCE @10KHz, 0.1Vrms : PIN 6-10 <9-7 SHORT> = 780uH $\pm$ 6%
3. LEAKAGE INDUCTANCE @100KHz, 0.1Vrms :
PIN 6-10 <W/H 7-9 2-4 1-5 SHORT> = 20uH MAX.
4. INTERWINDING CAP. @100KHz, 0.1Vrms :
PIN 6-5 <W/H 7-9 2-4 SHORT> = 30pF MAX.
5. TURN RATIO @15KHz, 0.1Vrms :
PIN 6-10 <9-7 SHORT> : PIN 5-1 <2-4 SHORT> = 3.3 $\pm$ 1%
6. HI-POT <@3000VAC, 1mA, 1SEC> : PIN 6-5 <7-9 2-4 SHORT>

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-555A	
A	DCR	11/09/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	11/05/2001	DOLLY	CPLIU	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/05/01		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	