
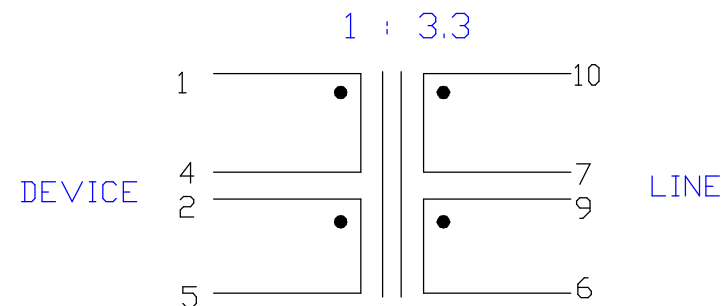
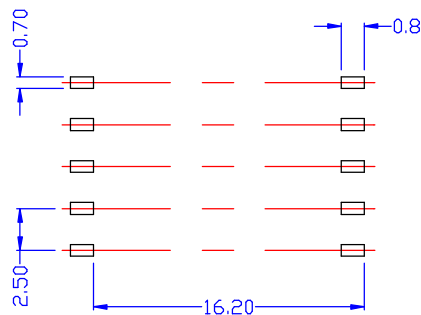
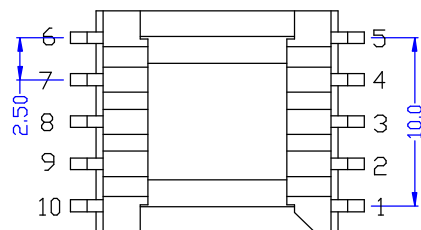

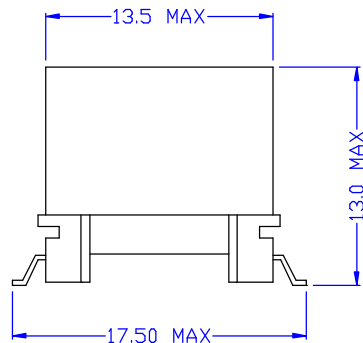


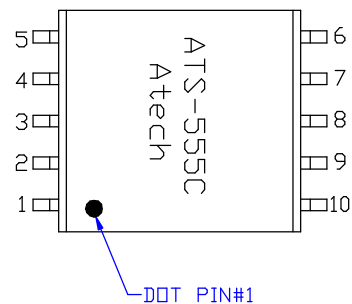

ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 235 mΩ MAX.
PIN 2-5 = 310 mΩ MAX.
PIN 9-6 = 10-7 = 830 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 10-6 (9-7 SHORT) = 780uH ± 6%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 10-6 (9-7, 2-4, 1-5 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@10KHz, 0.1Vrms) :
PIN 1-10 (9-7, 2-4 SHORT) = 50pF MAX.
- TURN RATIO (@2.5MHz, 0.1Vrms) :
PIN 10-6 (9-7 SHORT) : PIN 1-5 (2-4 SHORT) = 3.3 ± 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : P-S

					Atech[®] Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE ADSL TRANSFORMER		
						DWG. NO. ATS-555C		
	RELEASE	07/14/2003	RDRY	KEVIN		SUEDY	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK		APPD		
REVISIONS								