
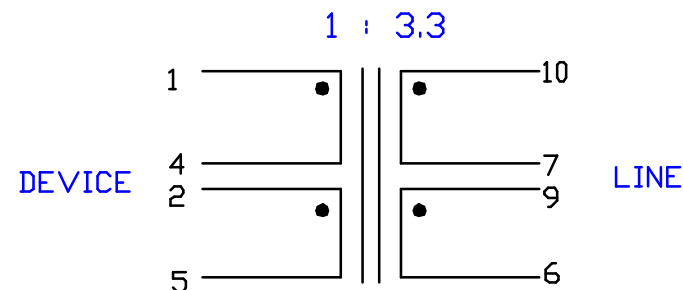
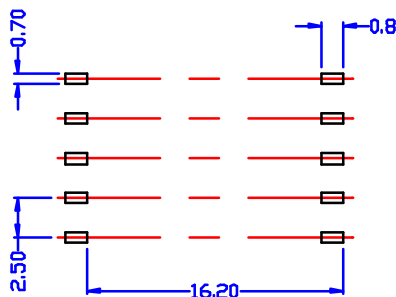
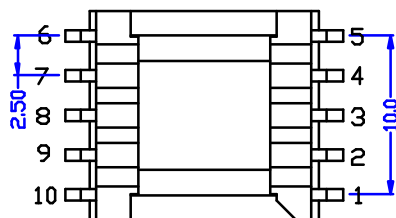



DOT PIN#1



ELECTRICAL CHARACTERISTICS : (FOR 51130 COMPATIBLE)

1. D.C.R. : PIN 4-1 = 0.268 OHM $\pm$ 12%
PIN 2-5 = 0.2 OHM $\pm$ 12%
PIN 6-9 = 7-10 = 0.723 OHM $\pm$ 12%
2. INDUCTANCE (@10KHz, 0.1Vrms) : PIN 6-10 (<9-7 SHORT) = 780uH $\pm$ 6%
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (<W/H 7-9 2-4 1-5 SHORT) = 20uH MAX.
4. INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (<W/H 7-9 2-4 SHORT) = 30pF MAX.
5. TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10 (<9-7 SHORT) : PIN 5-1 (<2-4 SHORT) = 3.3 $\pm$ 1%
6. HI-POT (@3000VAC, 1mA, 1SEC) : PIN 6-5 (<7-9 2-4 SHORT)
7. TRAY PACKING

						Atech® Atech Technology Co., Ltd. TEL: 02-2704-6667 FAX: 02-2704-0804	TITLE ADSL TRANSFORMER
						DWG. NO. ATS-555T2L	
RELEASE 03/22/2005	PAIR 03/22/2005	SUEDY 03/22/2005	SUEDY 03/22/2005	UNITS: M/M	SAFETY 03/22/05	SHEET 1 OF 1 DRAW Pair	
REVISIONS							