
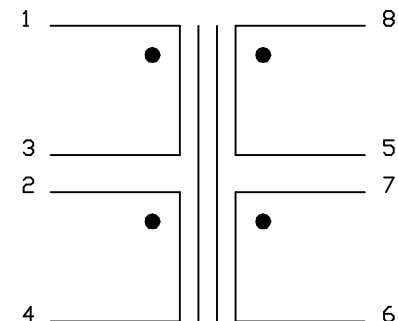
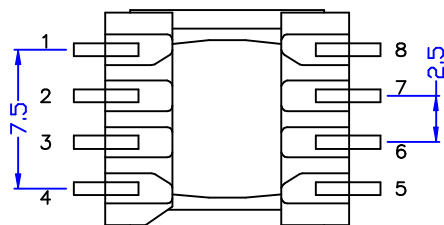

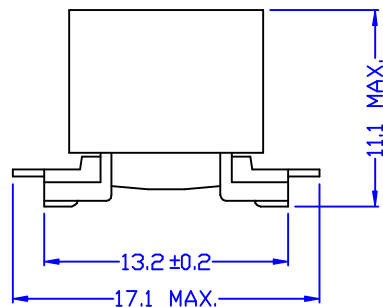


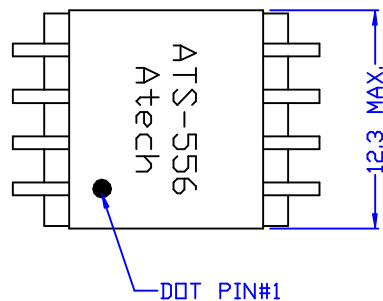

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 8-5 = 0.302 OHM $\pm$ 12%
PIN 7-6 = 0.465 OHM $\pm$ 12%
PIN 2-4 = 1-3 = 1.13 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 SHORT) = 1.2mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3 5-7 6-8 SHORT) = 30uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-8 (2-3 5-7 SHORT) = 35pF MAX.
- TURN RATIO (@1MHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-6 (5-7 SHORT) = 3 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-8 (2-3 5-7 SHORT)

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								ATS-556
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS:	SAFETY	SHEET 1 OF 1
						M/M		DRAW
REVISIONS						DATE		Pair
						01/28/02		