
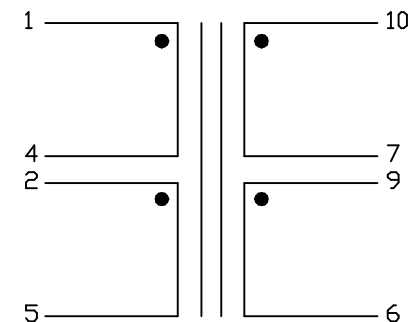
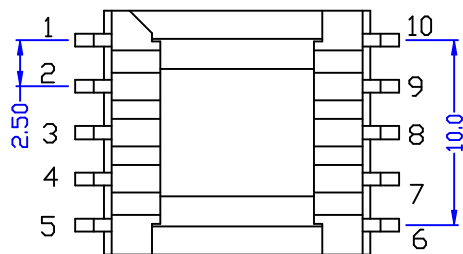
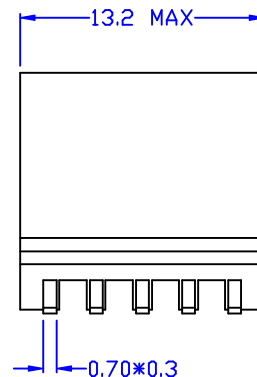
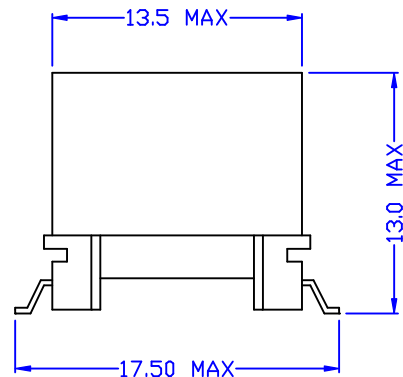


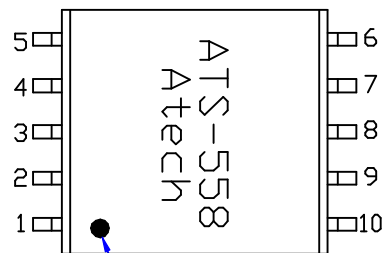

ELECTRICAL CHARACTERISTICS : <UTB00298S COMPATIBLE>

- DCR : PIN 10-7 = $0.942 \Omega \pm 12\%$
PIN 9-6 = $1.26 \Omega \pm 12\%$
PIN 1-4 = 2-5 = $0.48 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (<9-7 SHORT) = $440\mu\text{H} \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
(W/H 9-7 1-4 2-5 SHORT) PIN 10-6 = $11\mu\text{H} \text{ MAX.}$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (W/H 2-4 7-9 SHORT) = $55\text{pF} \text{ MAX.}$
- TURN RATIO (@250KHZ, 1Vrms) :
PIN 10-6 (<7-9 SHORT) : 1-5 (<2-4 SHORT) = $1.6 \pm 1\%$
- HI-POT (@1875VAC, 1mA, 2SEC) : PIN 1-10 (<2-4, 7-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-558	
	RELEASE	11/28/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/28/01			
REVISIONS									