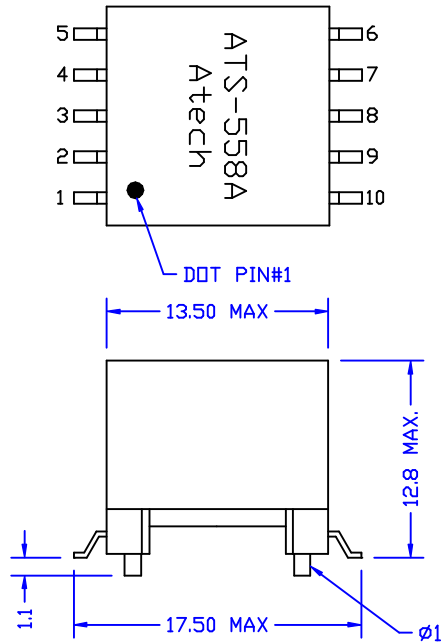


ELECTRICAL CHARACTERISTICS : <UTB00298S COMPATIBLE>

- DCR : PIN 10-7 = $0.942 \text{ OHM} \pm 12\%$
PIN 9-6 = $1.26 \text{ OHM} \pm 12\%$
PIN 1-4 = 2-5 = $0.48 \text{ OHM} \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (9-7 SHORT) = $440\mu\text{H} \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
(W/H 9-7 1-4 2-5 SHORT) PIN 10-6 = $11\mu\text{H MAX.}$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (W/H 2-4 7-9 SHORT) = 55pF MAX.
- TURN RATIO (@250KHZ, 1Vrms) : PIN 10-6 (7-9 SHORT) : 1-5 (2-4 SHORT) = $1.6 \pm 1\%$
- HI-POT (@1875VAC, 1mA, 2SEC) : PIN 1-10 (2-4, 7-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:0228794-6667 FAX:0228794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-558A	
	RELEASE	12/25/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/25/01			DRAW <i>Pair</i>
REVISIONS									