
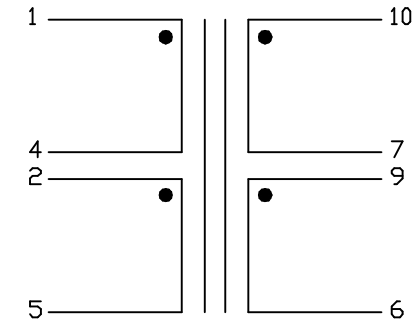
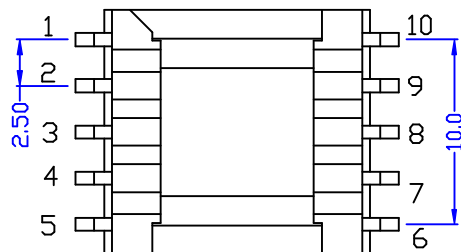
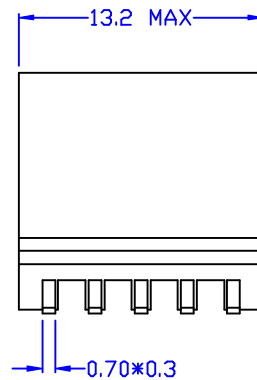


DOT PIN#1

W/H KAPTON TAPE

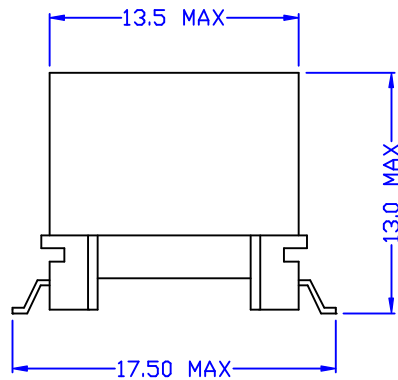

ELECTRICAL CHARACTERISTICS : <UTB00298S COMPATIBLE>

- DCR : PIN 10-7 = 0.942 OHM $\pm$ 12%
PIN 9-6 = 1.26 OHM $\pm$ 12%
PIN 1-4 = 2-5 = 0.48 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (<9-7 SHORT) = 440uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
(W/H 9-7 1-4 2-5 SHORT) PIN 10-6 = 11uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (W/H 2-4 7-9 SHORT) = 55pF MAX.
- TURN RATIO (@250KHZ, 1Vrms) :
PIN 10-6 (<7-9 SHORT) : 1-5 (<2-4 SHORT) = 1.6 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PIN 1-10 (<2-4, 7-9 SHORT)

					Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-558T	
RELEASE		07/17/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						07/17/02	DRAW <i>Pair</i>	