
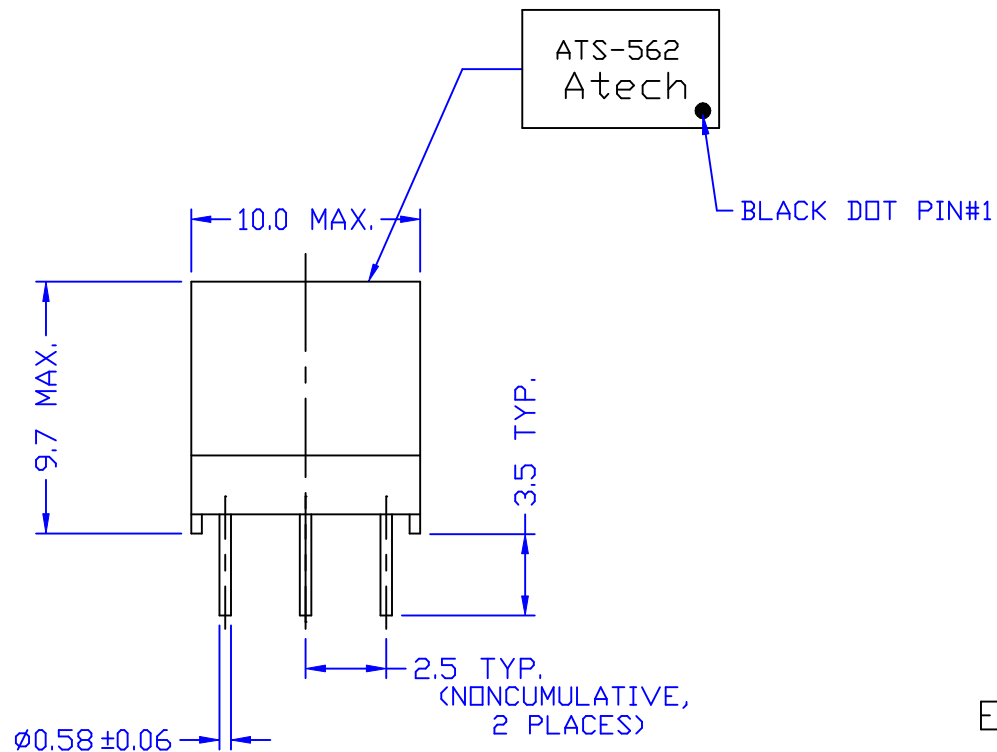


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 0.29 Ω MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 193.6uH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 174uH MIN.
- TURN RATIO (@1.2MHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

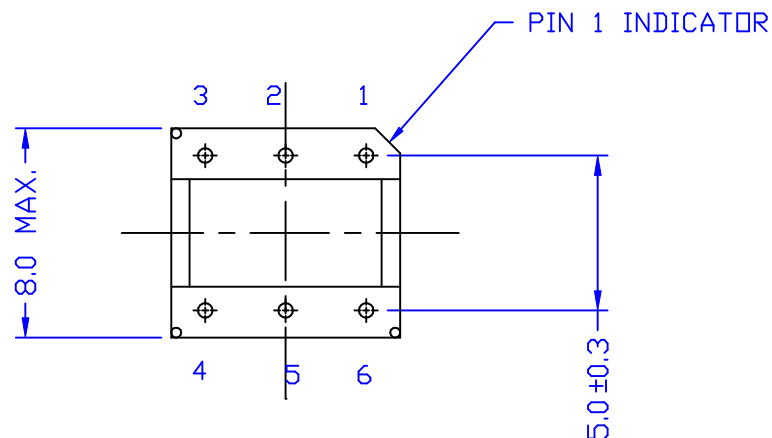

						Atech®		TITLE
B	ERASE FM-EP7-02	01/31/2005	BART	ANDY	SUEDY	Atech Technology Co., Ltd.		INDUCTOR FOR
A	TURN RATIO	11/15/2002	DOLLY	KEVIN	SUEDY	TEL:0212794-6667 FAX:0212794-8004		ISDN/POTS SPLITTER
	RELEASE	10/06/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	DWG. NO.
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		ATS-562
REVISIONS						DATE	P/N	SHEET OF 1
						10/06/01	CTA40700BA	DRAW Pair