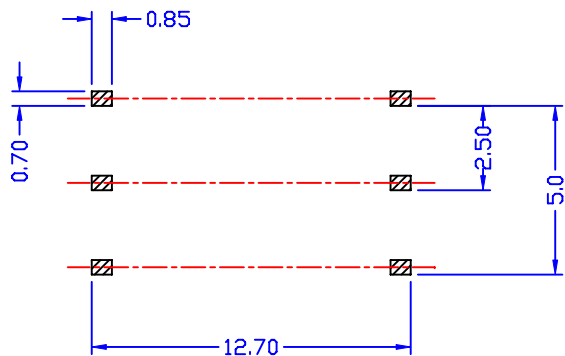
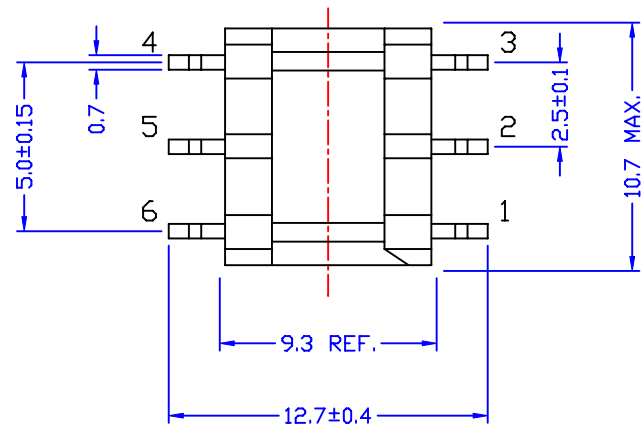
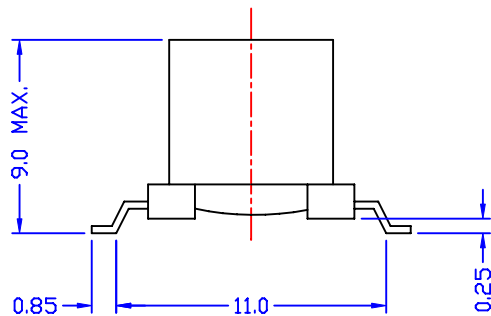
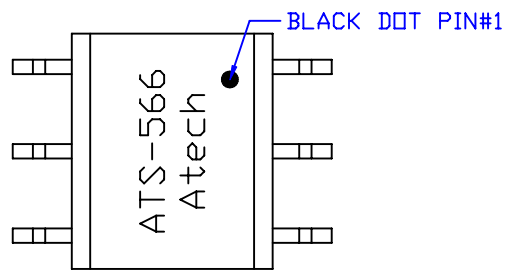


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-6 = 9.43 OHM MAX.
PIN 3-4 = 11.85 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-6 = 3-4 = 3.5mH ± 9%
PIN 1-6 (W/H 25mADC) = 3.5mH ± 9%
- LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-6 (W/H 3-4 SHORT) = 120uH MAX.
- INTERWINDING CAP (@100KHZ, 0.1Vrms) : PIN 1-3 = 20pF MAX.
- TURN RATIO (@5KHZ, 1Vrms) : PIN 1-6 : PIN 3-4 = 1 ± 1%
- SRF (W/H 3-6 SHORT) : PIN 1-4 = 420KHZ MIN.
- HI-POT (@600VAC, 500uA, 1SEC) : PIN 1-3

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE MICRODATA FILTER INDUCTOR	
							DWG. NO. ATS-566A	
	RELEASE	12/20/2006	PAIR	SEN	EUGENE		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE	P/N
REVISIONS						12/20/06	SHEET 1 OF 1 DRAW <i>Pair</i>	