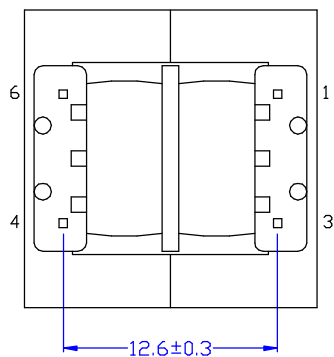

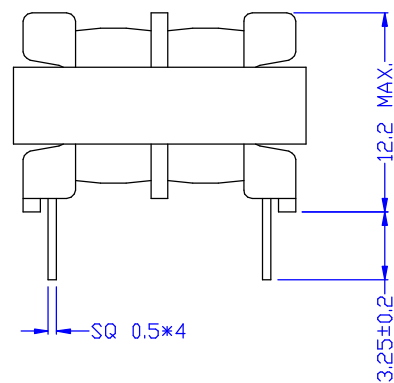
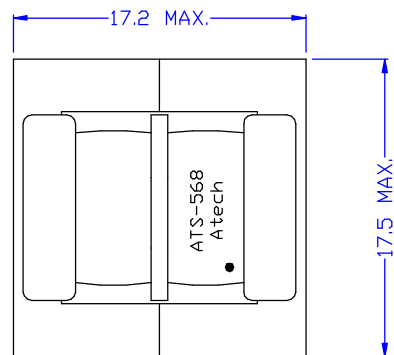


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 0.95 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 6mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 5.4mH MIN.
3. TURN RATIO (@250KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
4. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech®		TITLE	INDUCTOR FOR SPLITTER
B	T/R	03/19/2004	BART	AL	SUEDY	Atech Technology Co. Ltd.		DWG. NO.	ATS-568
A	BB	05/21/2002	DOLLY	JEFF	SUEDY	TEL: (02) 2794-6667 FAX: (02) 2794-8004			
RELEASE		11/07/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						DATE	11/07/01	Pair	