
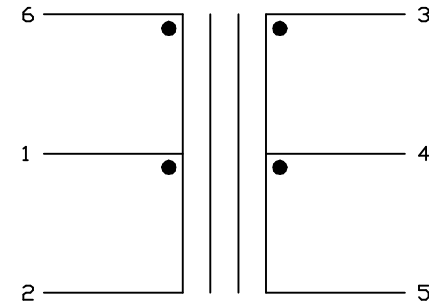
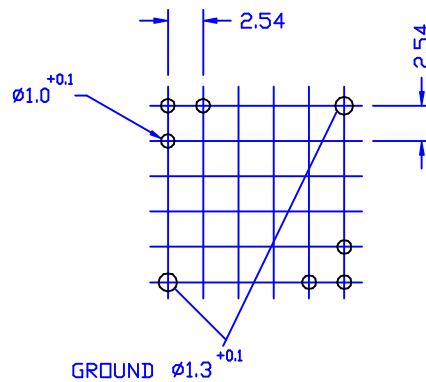
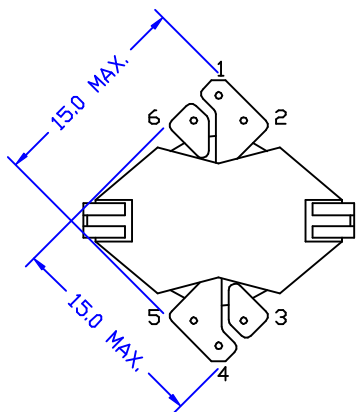
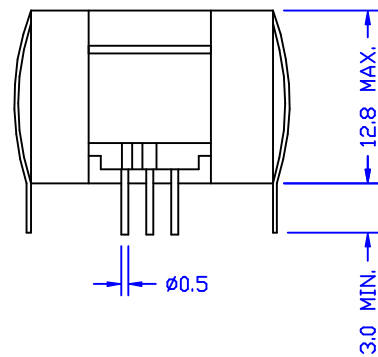


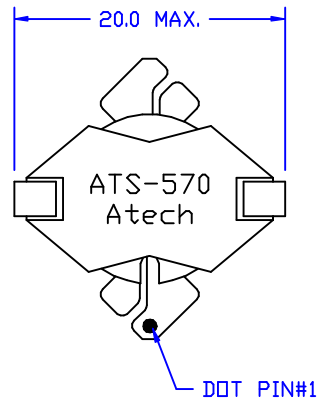

ELECTRICAL CHARACTERISTICS : <671-5769 COMPATIBLE>

- DCR : PIN 6-2 = 8.85 Ω HM $\pm$ 12%
PIN 5-3 = 38 Ω HM $\pm$ 12%
- INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 5-3 = 1.82H MIN.
- INSERTION LOSS (@1KHZ, 0dBm 5-3 W/H 636 Ω HM) :
PIN 6-2 = 1dB MAX.
- FREQ RESP. (@REF 1KHZ) : (@100HZ) = $\pm$ 0.5dB
(@112KHZ) = $\pm$ 0.5dB
- TURN RATIO (@10KHZ, 0.1Vrms) : PIN 5-3 : PIN 2-6 = 2.167 $\pm$ 1%
- HI-POT (@1200VAC, 1mA, 2SEC) : PRI - SEC
PRI - CORE
SEC - CORE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 135 : 636 TRANSFORMER	
							DWG. NO. ATS-570	
	RELEASE	11/23/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/23/01		