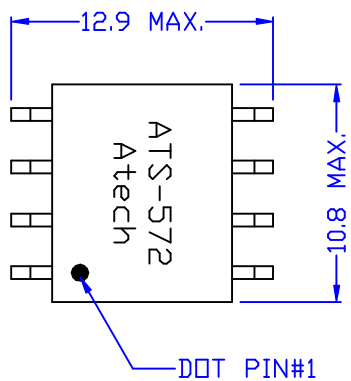


ELECTRICAL CHARACTERISTICS : <UTB00073S COMPATIBLE>

1. DCR : PIN 1-3 = 2-4 = 1.15 OHM $\pm$ 12%
PIN 8-6 = 0.7 OHM $\pm$ 12%
PIN 7-5 = 0.88 OHM $\pm$ 12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 850uH $\pm$ 10%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 8-5 7-6 SHORT) = 5uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-8 (2-3 6-7 SHORT) = 65pF MAX.
5. TURN RATIO (@400KHZ, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 8-5 (6-7 SHORT) = 1 $\pm$ 1%
6. HI-POT (@1875VAC, 500uA, 1SEC) : PIN 1-8 (2-3 7-6 SHORT)

						 Atech [®] Atech Technology Co., Ltd. TEL: (82) 2794-6667 FAX: (82) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-572	
	RELEASE	01/17/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/17/02			
REVISIONS						DRAW <i>Pair</i>			