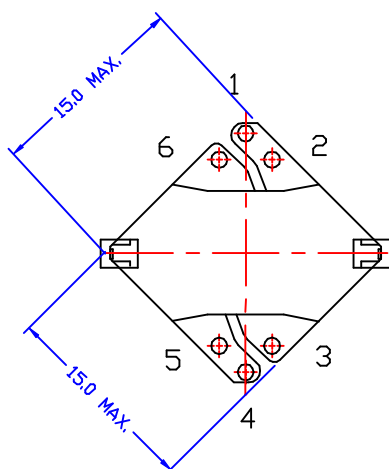
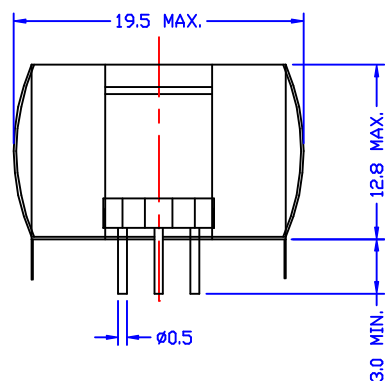
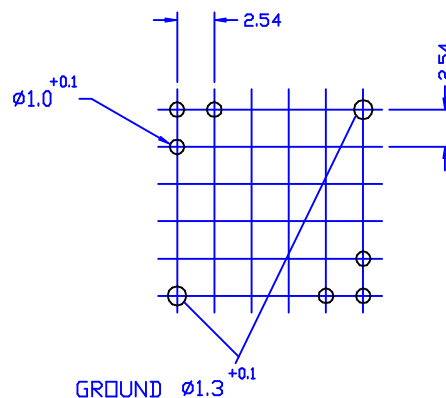


1. D.C.R. : PIN 6-2 = 3-5 = 5 Ω M $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 6-5 (2-3 SHORT) = 50mH $\pm$ 5%
3. TURN RATIO (@80KHZ, 1Vrms) : PIN 6-2 : PIN 3-5 = 1 $\pm$ 1%
4. HI-POT (@500VAC, 1mA, 2SEC) : PRI.-SEC.

						 Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE INDUCTOR	
							DWG. NO. ATS-573	
	RELEASE	12/10/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/10/01		
REVISIONS								