
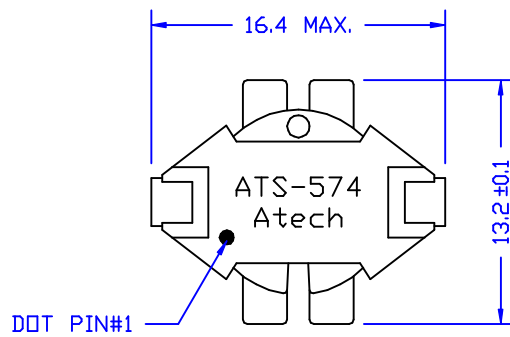
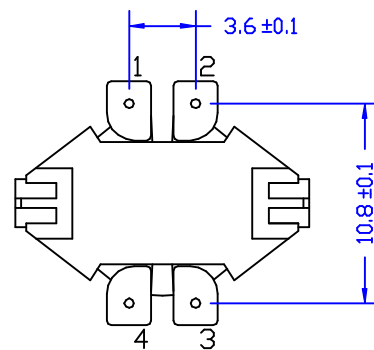
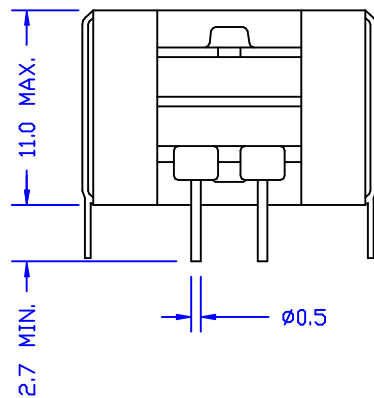


GRIDE 2.54

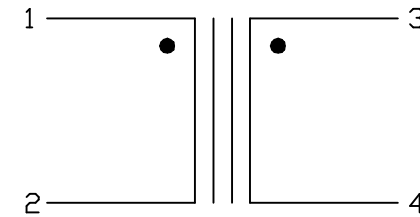

ELECTRICAL CHARACTERISTIC :

1. DCR : PIN 1-2 = 3-4 = 2.5 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-4 (2-3 SHORT) = 8.6mH $\pm$ 5%
3. TURN RATIO (@190KHZ, 1Vrms) : PIN 1-2 : 3-4 = 1 $\pm$ 1%
4. HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INDUCTOR		
							DWG. NO. ATS-574		
	RELEASE	12/10/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						12/10/01			