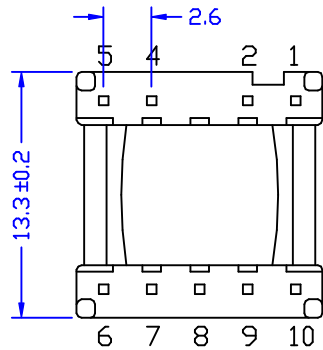
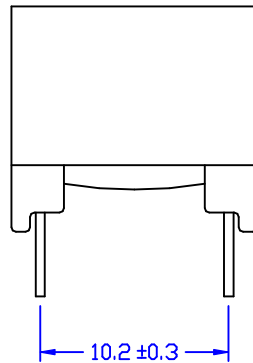
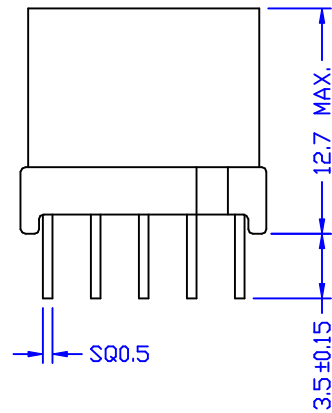



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 1.65 Ω M $\pm$ 10%
PIN 9-7 = 0.43 Ω M $\pm$ 10%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 2mH $\pm$ 7%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 7-9 SHORT) = 26uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) : PIN 1-9 (2-4 SHORT) = 50pF MAX.
- TURN RATIO (@1MHZ, 1Vrms) : PIN 1-5 (W/H 2-4 SHORT) : PIN 9-7 = 3.7 $\pm$ 2%
- HI-POT (@1875VAC, 1mH, 1SEC) : PIN 1-9 (2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-576	
	RELEASE	12/17/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						12/17/01			