

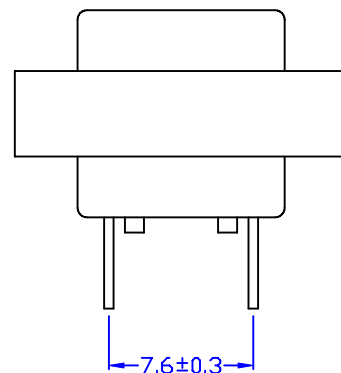
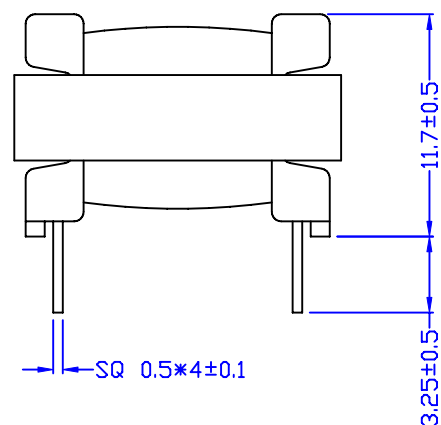
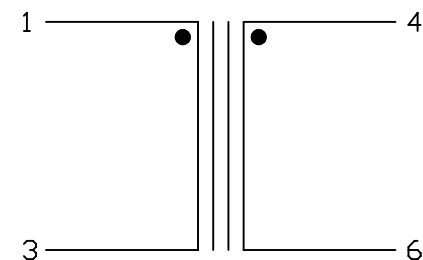


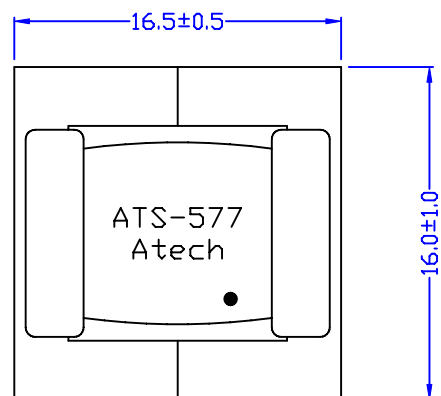

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 19.4 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 56mH ± 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 50.4mH MIN.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 ± 1%
4. TURN RATIO (@78KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 ± 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

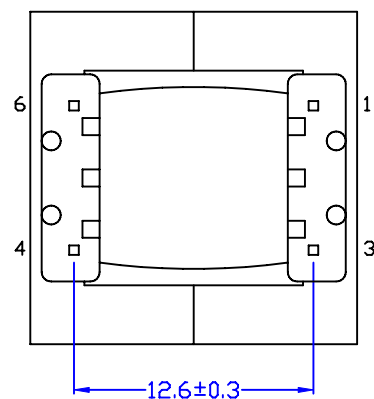

D	BOBBIN	05/22/2002	DOLLY	JEFF	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	INDUCTOR FOR SPLITTER
C	PIN LENGTH	03/12/2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-577
B	TURN RATIO	03/08/2002	DOLLY	JEFF	SUEDY			
	RELEASE	12/06/2001	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTAH16003A	DRAW <i>Pair</i>
REVISIONS						12/06/01		