

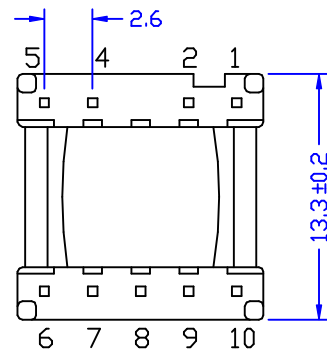
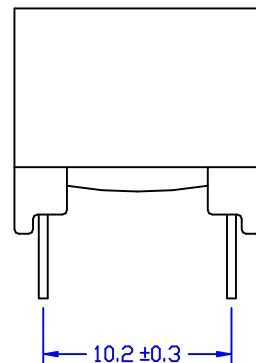
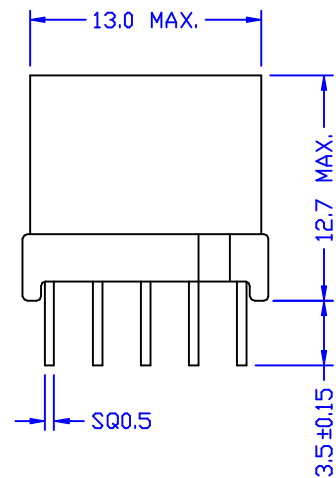


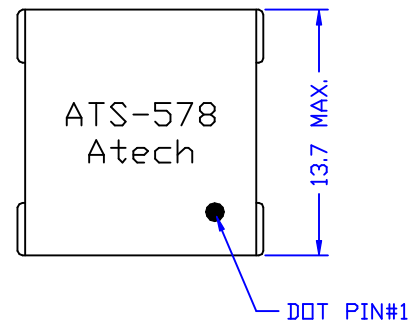

2SP : 1



ELECTRICAL CHARACTERISTICS : (FOR 50772 COMPATIBLE)

1. DCR : PIN 1-4 = 2-5 = 2.92 OHM MAX.
PIN 9-7 = 1.47 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 2mH ± 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-5 (2-4 7-9 SHORT) = 20uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-9 (4-2 SHORT) = 70pF MAX.
5. TURN RATIO (@480KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 2 ± 1%
6. HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8804	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-578	
	RELEASE	12/24/2001	DOLLY	JEFF	SUEDY		UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						12/24/01	DRAW <i>Pair</i>	