
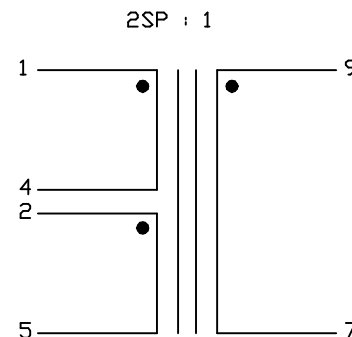
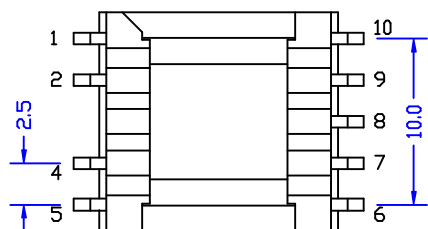



DOT PIN#1

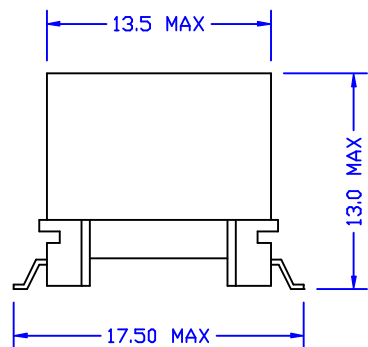

ELECTRICAL CHARACTERISTICS : <FOR 50772 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 3.18 OHM MAX.
PIN 9-7 = 1.60 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 2mH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) : PIN 1-5 (2-4 9-7 SHORT) = 23uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-9 (4-2 SHORT) = 70pF MAX.
- TURN RATIO (@480KHZ, 1Vrms) : PIN 1-5 (2-4 SHORT) : PIN 9-7 = 2 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER		
							DWG. NO. ATS-578A(83)		
	RELEASE	12/25/2001	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						12/25/01			