
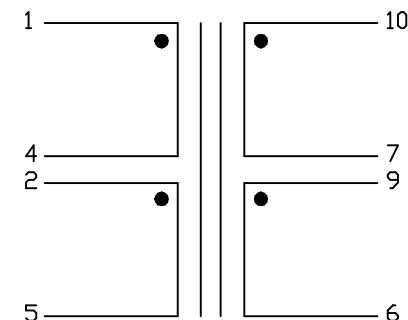
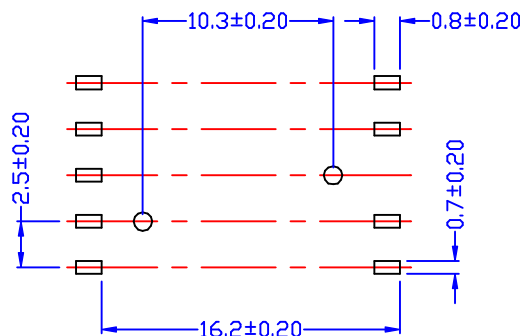
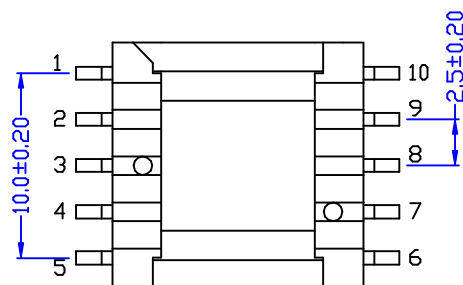
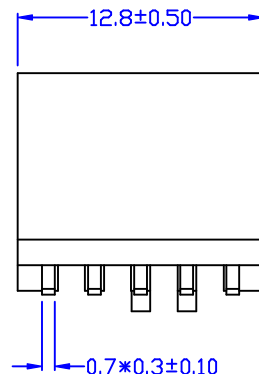
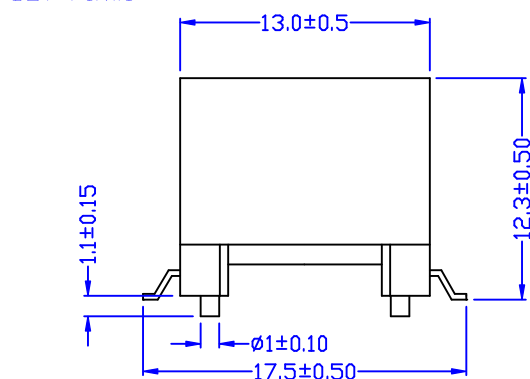


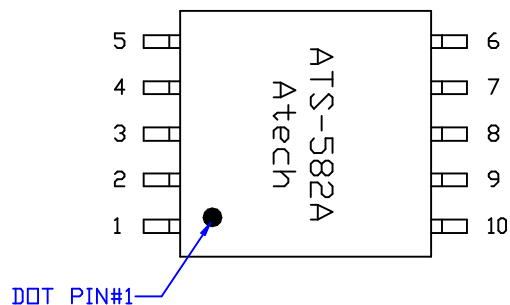

ELECTRICAL CHARACTERISTICS : (AP 0775 COMPATIBLE)

- DCR : PIN 1-4 = 2-5 = 0.36 OHM ± 15%
PIN 10-7 = 9-6 = 0.138 OHM ± 15%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 410uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 9-6 10-7 SHORT) = 10 +0/-10uH
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (2-4 7-9 SHORT) = 25 ± 10pF
- TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = 2 ± 1%
- HI-POT (@2000VAC, 1mA, 2SEC) : PIN 1-10

						Atech®		TITLE	ADSL TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-582A
						TEL:022794-6667 FAX:022794-8004			
A	TOLERANCE	03/12/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	12/14/2001	DOLLY	CPLIU	SUEDY	DATE		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						12/14/01		Pair	