
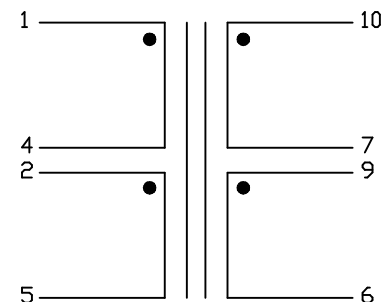
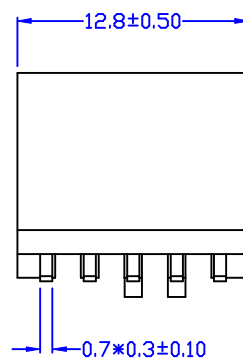
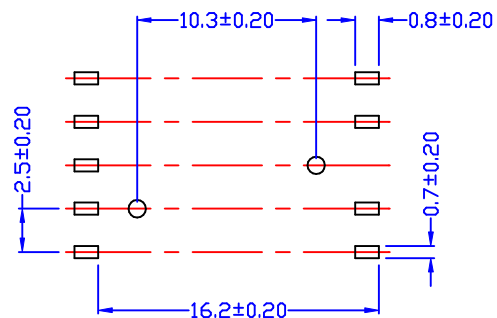


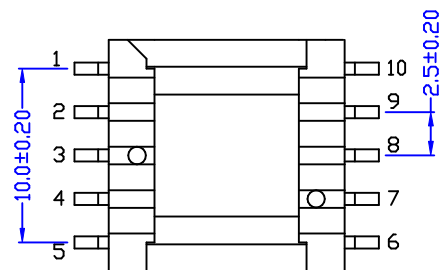

1. DCR : PIN 1-4 = 2-5 = 0.57 OHM $\pm$ 12%
PIN 10-7 = 9-6 = 0.145 OHM $\pm$ 12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-5 (2-4 SHORT) = 410uH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 9-6 10-7 SHORT) = 8 uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 (2-4 7-9 SHORT) = 27 $\pm$ 12pF
5. TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = 2 $\pm$ 1%
6. HI-POT (@2000VAC, 1mA, 2SEC) : PIN 1-10

						 Atech[®] Atech Technology Co., Ltd. TEL:02794-6667 FAX:02794-8004	TITLE ADSL TRANSFORMER	
A	SPEC.	12/02 /2004	BART	AL	SUEDY		DWG. NO.	ATS-582B
	RELEASE	04/16 /2001	DOLLY	CPLIU	SUEDY		UNITS: M/M	SAFETY SHEET 1 OF 1 DRAW <i>Pair</i>
NO:	DESCRIPTION	DATE	BY	CHK	APPD		DATE 04/16/02	
REVISIONS								