
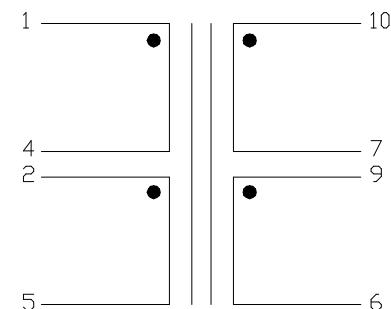
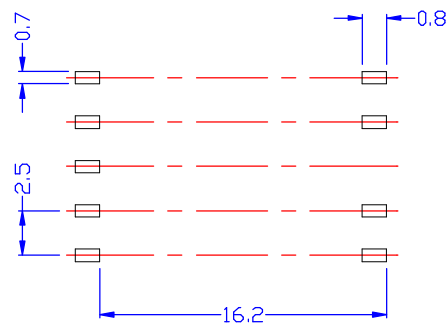
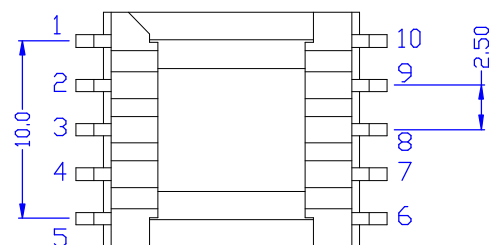


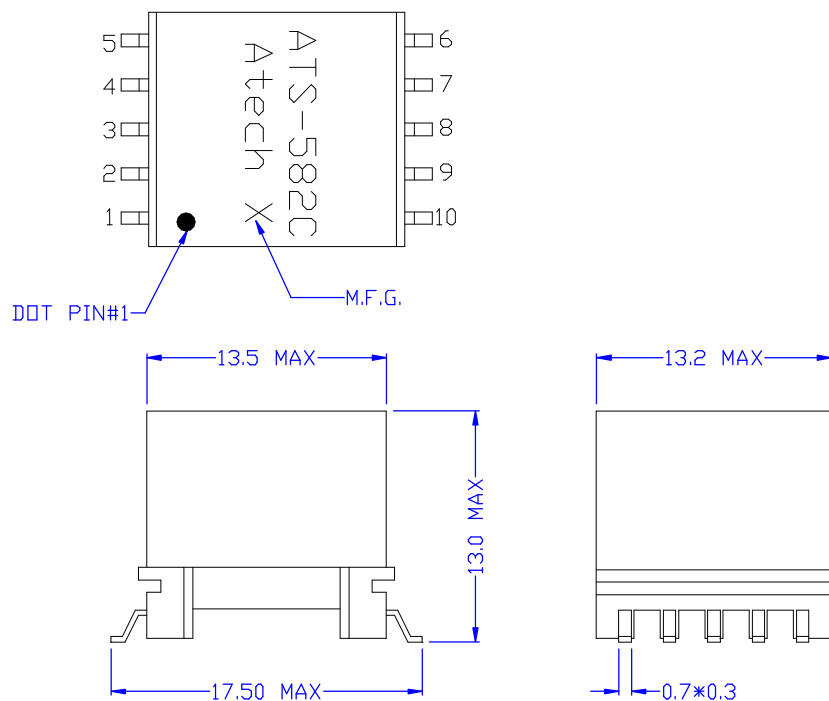

ELECTRICAL CHARACTERISTICS : <LAL0215 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = $0.77 \Omega \pm 12\%$
PIN 10-7 = 9-6 = $0.195 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = $410 \mu H \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (W/H 2-4 9-6 10-7 SHORT) = $8 +0/-8 \mu H$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-4 7-9 SHORT) = $27 \pm 12 pF$
- TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = $2 \pm 1\%$
- HI-POT (@2000VAC, 1mA, 2SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8804		TITLE: ADSL TRANSFORMER	
								DWG. NO.: ATS-582C	
	RELEASE	04/09/2004	BART	PAIR	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						04/09/04		DRAW <i>Pair</i>	