
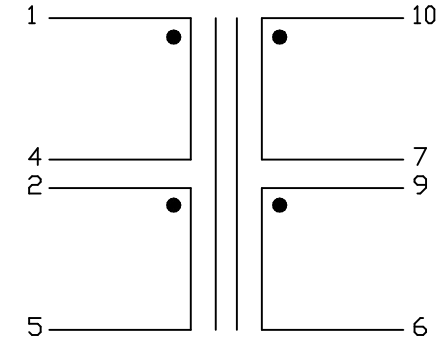
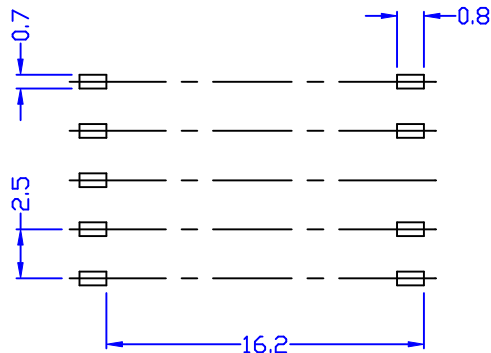
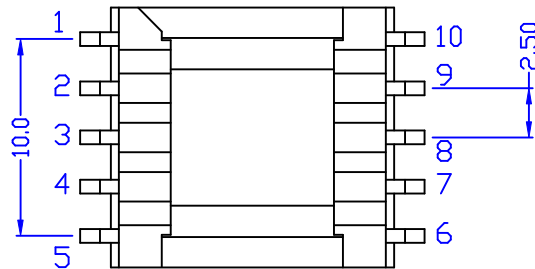
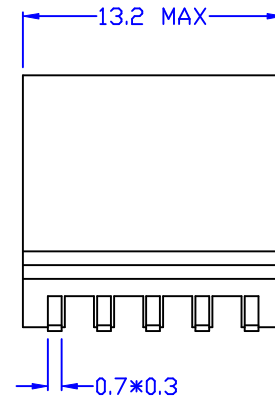
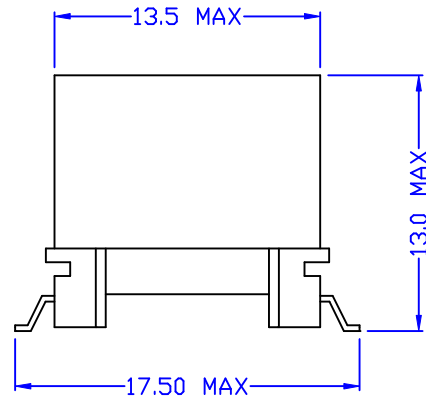


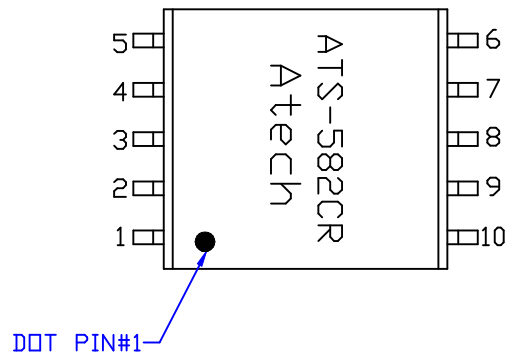

ELECTRICAL CHARACTERISTICS : <LAL0215 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = $0.77 \Omega \pm 12\%$
PIN 10-7 = 9-6 = $0.195 \Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = $410\mu H \pm 5\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (w/H 2-4 9-6 10-7 SHORT) = $8 +0/-8\mu H$
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-4 7-9 SHORT) = $27 \pm 12pF$
- TURN RATIO (@7KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (9-7 SHORT) = $2 \pm 1\%$
- HI-PDT (@2000VAC, 1mA, 2SEC) : PIN 1-10
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	ADSL TRANSFORMER
							DWG. NO.	ATS-582CR
	RELEASE	03/13/2006	PAIR	AL	EUGENE		UNITS:	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		M/M	
REVISIONS						DATE		DRAW <i>Pair</i>
						03/13/06		