
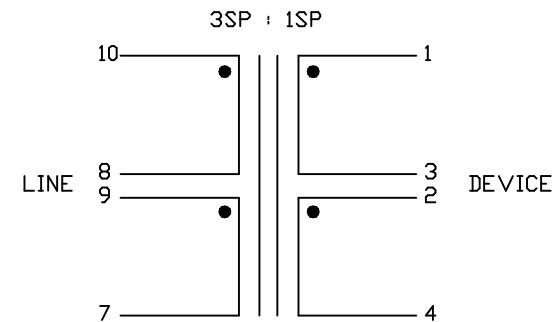
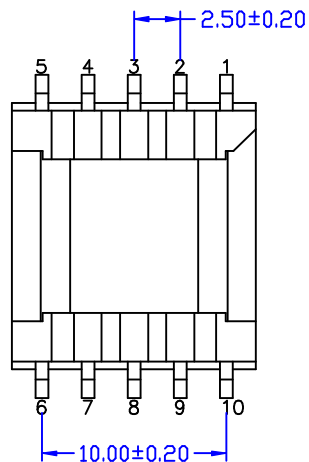
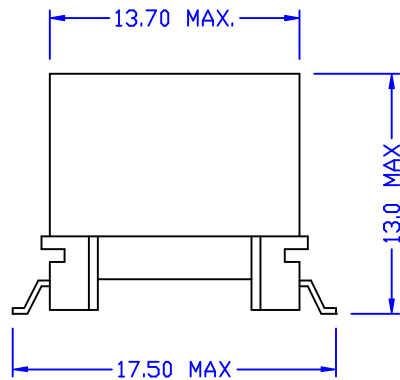
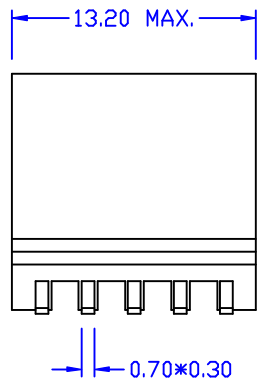


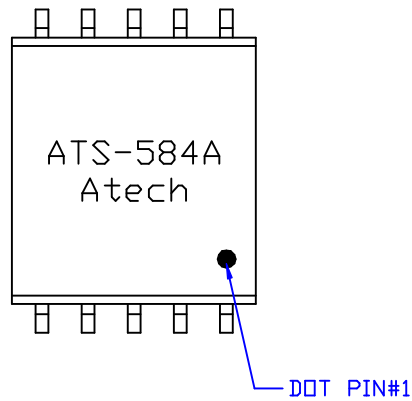

ELECTRICAL CHARACTERISTICS : <FOR 51364 COMPATIBLE>

- DCR : PIN 10-8 = 9-7 = 0.5 Ω HM $\pm$ 10%
PIN 1-3 = 0.15 Ω HM $\pm$ 10%
PIN 2-4 = 0.21 Ω HM $\pm$ 10%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-7 (8-9 SHORT) = 1.22mH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (8-9 2-3 7-10 SHORT) = 10uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-3 8-9 SHORT) = 40pF MAX.
- TURN RATIO (@800KHZ, 1Vrms) :
PIN 10-7 (8-9 SHORT) : PIN 1-4 (2-3 SHORT) = 3 $\pm$ 1%
- HI-POT (@1875VAC, 1mH, 1SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-584A	
	RELEASE	08/26/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						08/26/02		