
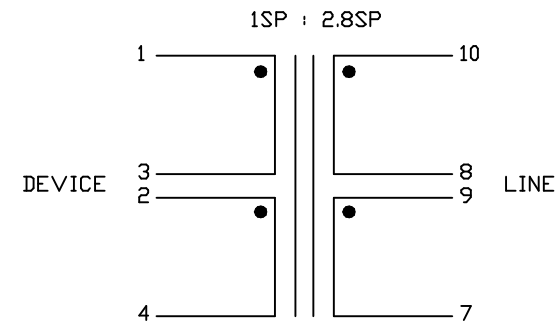
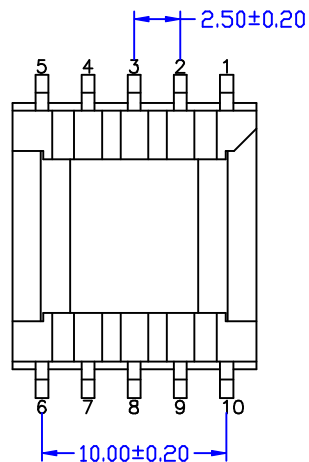
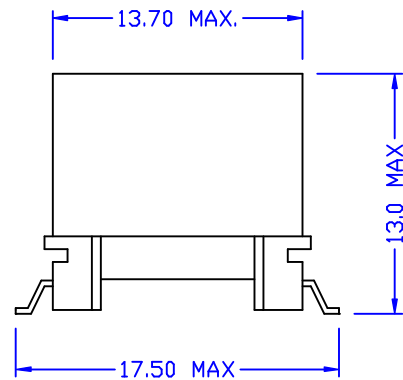
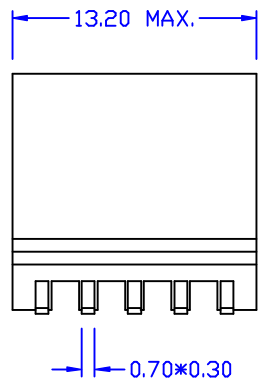


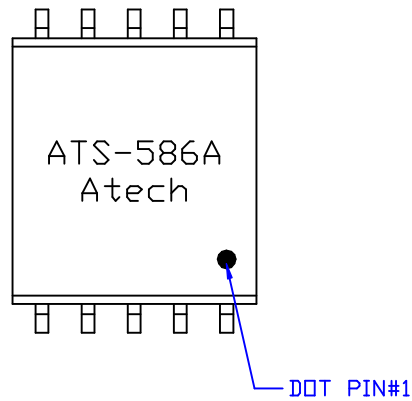

ELECTRICAL CHARACTERISTICS : (FOR 51363 COMPATIBLE)

- DCR : PIN 10-8 = 9-7 = $0.56 \Omega \pm 10\%$
PIN 1-3 = $0.17 \Omega \pm 10\%$
PIN 2-4 = $0.245 \Omega \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) = $176.4\mu H \pm 6\%$
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-7 (8-9 2-3 1-4 SHORT) = $16\mu H$ MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-3 8-9 SHORT) = $40pF$ MAX.
- TURN RATIO (@2.4MHZ, 1Vrms) :
PIN 10-7 (8-9 SHORT) : PIN 1-4 (2-3 SHORT) = $2.8 \pm 1\%$
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10, 2-10, 1-9, 2-9

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	ATS-586A
RELEASE		08/26/2002	DOLLY	JEFF	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	08/26/02		Pair