
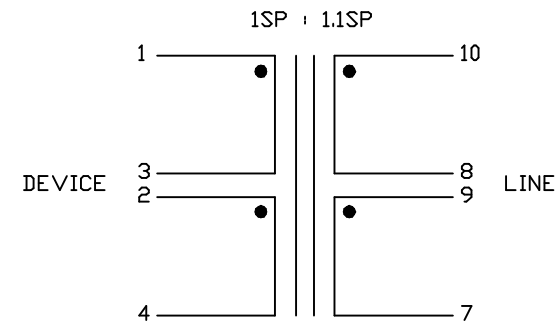
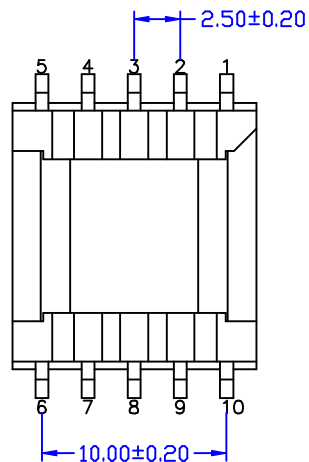
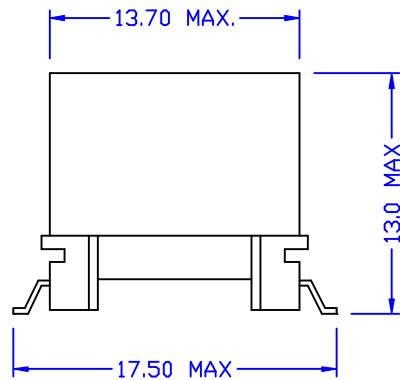
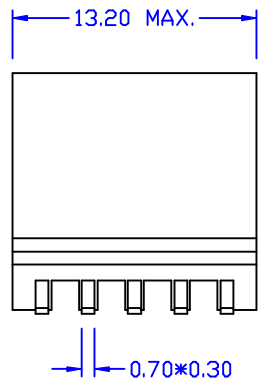


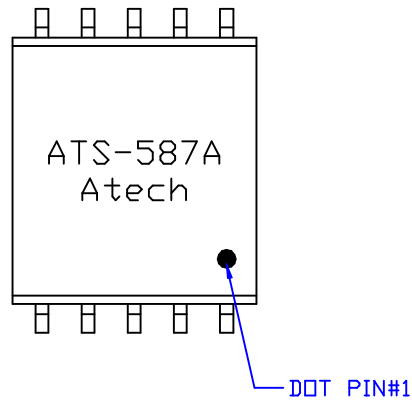

ELECTRICAL CHARACTERISTICS : <FOR 51481 COMPATIBLE>

- DCR : PIN 10-8 = 9-7 = 0.335 Ω HM $\pm$ 10%
PIN 1-3 = 0.27 Ω HM $\pm$ 10%
PIN 2-4 = 0.335 Ω HM $\pm$ 10%
- INDUCTANCE (@100KHZ, 2Vrms) :
PIN 1-4 <W/H 2-3 SHORT> = 100uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 <8-9 2-3 7-10 SHORT> = 4uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 1-10 <2-3 8-9 SHORT> = 40pF MAX.
- TURN RATIO (@1.3MHZ, 1Vrms) :
PIN 10-7 <8-9 SHORT> : PIN 1-4 <2-3 SHORT> = 1.1 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10 <8-9 2-3 SHORT>

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-587A	
	RELEASE	08/26/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						08/26/02			