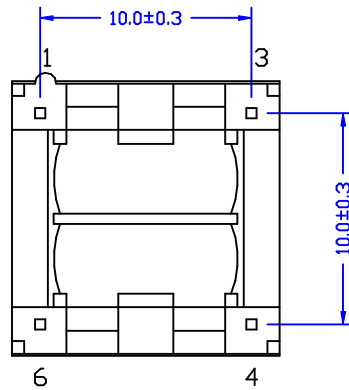

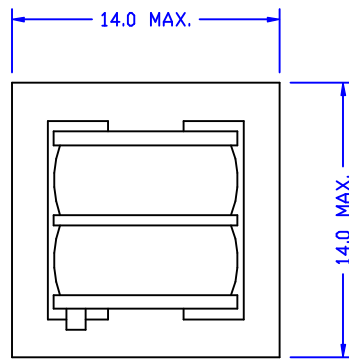


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 2.07 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 50mVrms) : PIN 1-3 = 1.57mH $\pm$ 5%
(@100mADC) : PIN 1-3 = 1.42mH MIN.
3. INDUCTANCE BALANCE (@1KHZ, 50mVrms) : PIN 1-3 : PIN 4-6 = 1 $\pm$ 3%
4. TURN RATIO (@250KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
5. HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INDUCTOR	
								DWG. NO. ATS-593B	
	RELEASE	09/18/2003	RORY	SIMON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						09/18/03			