
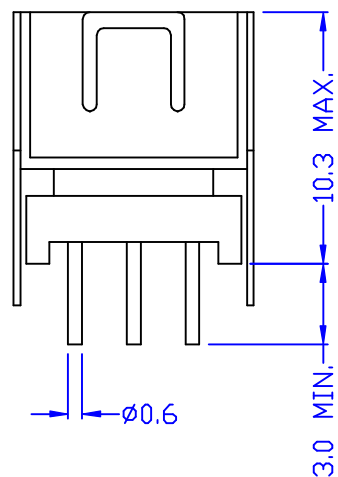
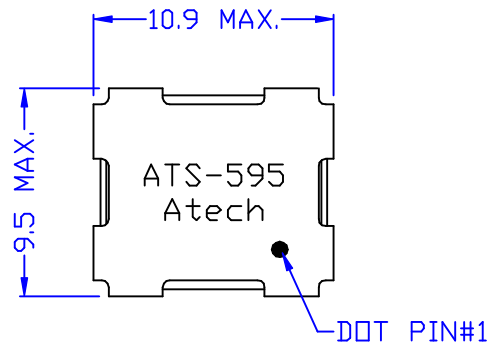


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 158 mΩHM ± 12%
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 115.6uH ± 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 104uH MIN.
- TURN RATIO (@1850KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 ± 1%
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE INDUCTOR FOR ISDN/POTS SPLITTER	
							DWG. NO.	ATS-595
	RELEASE	02/04/2002	DOLLY	JEFF	SUEDY		UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET OF 1	
REVISIONS						02/04/02	DRAW <i>Pair</i>	