
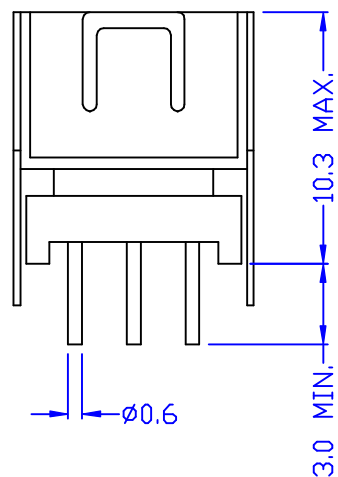
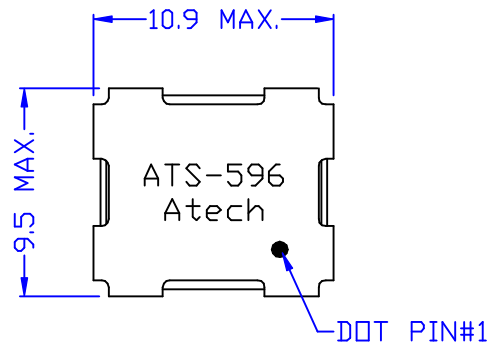


## ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 109 mΩHM ± 12%
- INDUCTANCE (@1KHZ, 1Vrms) :  
PIN 1-6 (3-4 SHORT) = 78.4uH ± 5%  
(@100mADC) : PIN 1-6 (3-4 SHORT) = 70.5uH MIN.
- TURN RATIO (@2.2MHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 ± 1%
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

|           |             |            |       |      |       |                                 |  |                                          |  |
|-----------|-------------|------------|-------|------|-------|---------------------------------|--|------------------------------------------|--|
|           |             |            |       |      |       | <b>Atech®</b>                   |  | TITLE INDUCTOR FOR<br>ISDN/POTS SPLITTER |  |
|           |             |            |       |      |       | Atech Technology Co., Ltd.      |  | DWG. NO.                                 |  |
|           |             |            |       |      |       | TEL:022794-6667 FAX:022794-8004 |  | ATS-596                                  |  |
| RELEASE   |             | 02/04/2002 | DOLLY | JEFF | SUEDY | UNITS:<br>M/M                   |  | SAFETY                                   |  |
| NO:       | DESCRIPTION | DATE       | BY    | CHK  | APPD  | DATE                            |  | SHEET OF 1                               |  |
| REVISIONS |             |            |       |      |       | 02/04/02                        |  | DRAW<br>Pair                             |  |