
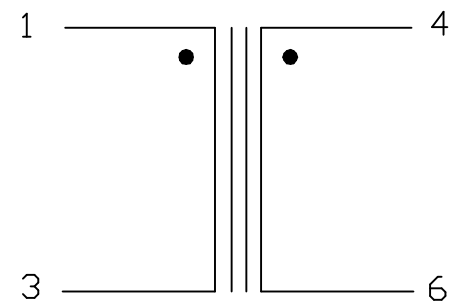
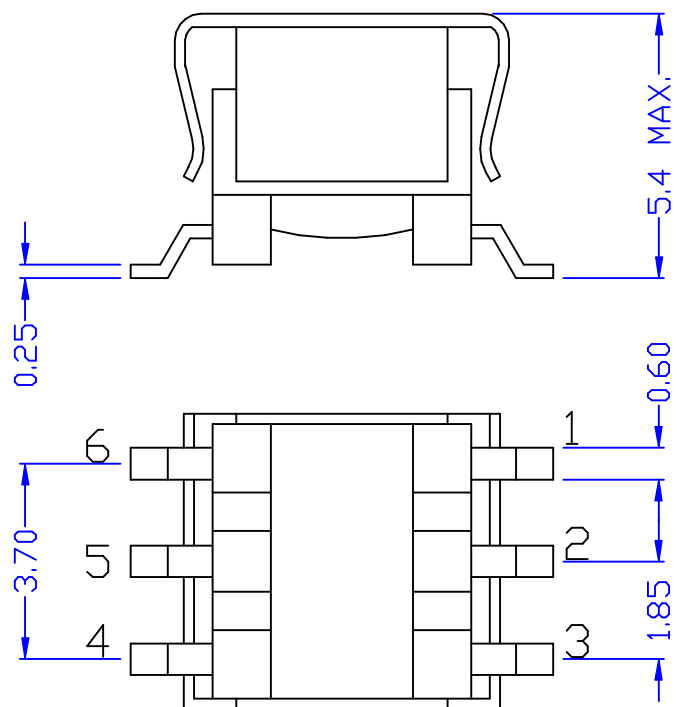


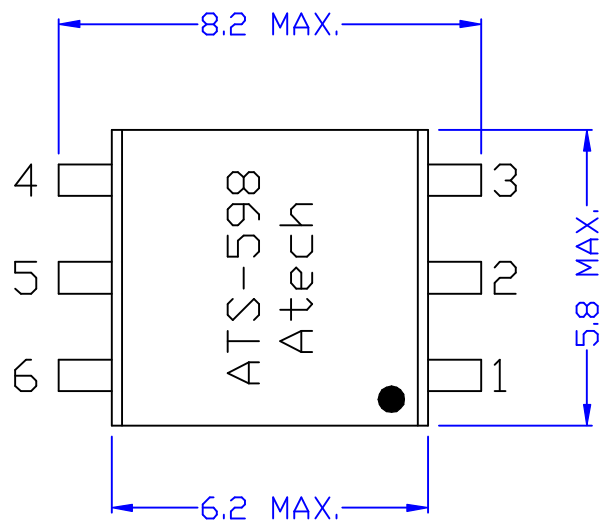

# ELECTRICAL CHARACTERISTICS : <UTB00195 COMPATIBLE>

1. DCR : PIN 1-3 = 4-6 = 9.5 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-3 = 500uH  $\pm$  8%
3. TURN RATIO (@450KHZ, 0.1Vrms) : PIN 1-3 : PIN 4-6 = 1  $\pm$  1%
4. HI-POT (@600VDC, 0.5mA, 2SEC) : PIN 1-6

|           |             |            |       |      |       |                                                                                |                            |
|-----------|-------------|------------|-------|------|-------|--------------------------------------------------------------------------------|----------------------------|
|           |             |            |       |      |       | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL:022794-6667 FAX:022794-8004 | TITLE<br>INDUCTOR          |
|           |             |            |       |      |       |                                                                                | DWG. NO.<br>ATS-598        |
|           | RELEASE     | 03/12/2002 | DOLLY | JEFF | SUEDY | UNITS:<br>M/M                                                                  | SAFETY<br><br>SHEET 1 OF 1 |
| NO:       | DESCRIPTION | DATE       | BY    | CHK  | APPD  | DATE<br>03/12/02                                                               |                            |
| REVISIONS |             |            |       |      |       |                                                                                | DRAW<br><i>Pair</i>        |