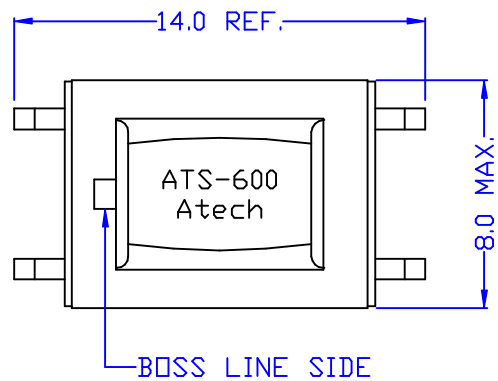


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 800 OHM $\pm$ 15%
PIN 6-4 = 667 OHM $\pm$ 15%
- INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-3 = 17H MIN.
- INSERTION LOSS (@1KHZ, 1Vrms, W/H 10K OHM) : PIN 1-3 = 1 $\pm$ 0.25dB
- FREQ RESP. (@REF 1KHZ) : (@300HZ) = $\pm$ 0.3dB
(@4KHZ) = $\pm$ 0.2dB
- RETURN LOSS (@REF 10K OHM) : (@300HZ) = 14dB MIN.
(@1KHZ) = 20dB MIN.
(@4KHZ) = 20dB MIN.
- TURN RATIO (@12KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
- HI-POT (@1250VAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE 10K : 10K TRANSFORMER	
								DWG. NO. ATS-600	
	RELEASE	03/27/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/27/02			