

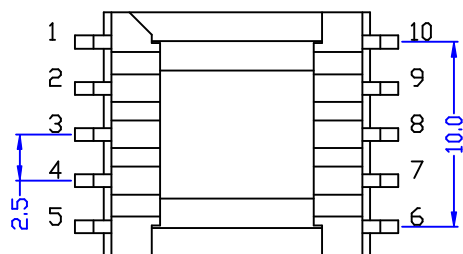
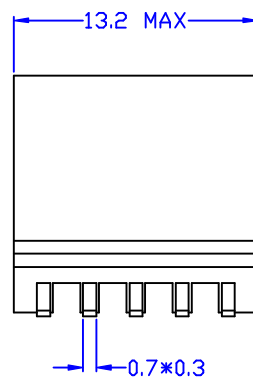


DOT PIN#1

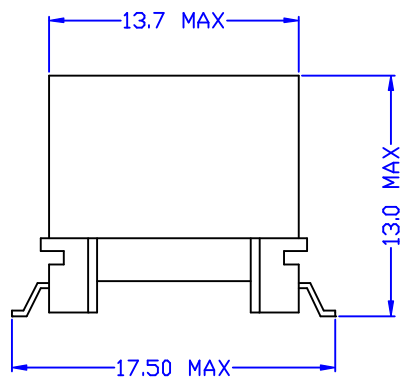

1.6SP : 1SP

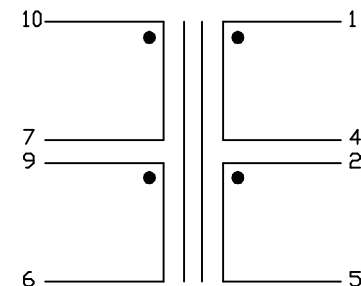

ELECTRICAL CHARACTERISTICS : <FOR C3028 COMPATIBLE>

1. DRC : PIN 1-4 = 2-5 = 0.458 OHM $\pm$ 12%
PIN 10-7 = 9-6 = 0.418 OHM $\pm$ 12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-6 (9-7 SHORT)= 100uH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 (7-9 1-5 2-4 SHORT) = 10uH MAX.
4. INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 10-1 (7-9 2-4 SHORT) = 50pF MAX.
5. TURN RATIO (@12KHZ, 1Vrms) :
PIN 10-6 (7-9 SHORT) : PIN 1-5 (2-4 SHORT) = 1.6 $\pm$ 1%
6. HI-POT (@1875VAC, 500uA, 1SEC) : PIN 1-10 (2-4 9-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-601	
	RELEASE	03/25/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						03/25/02			
								DRAW	Pair