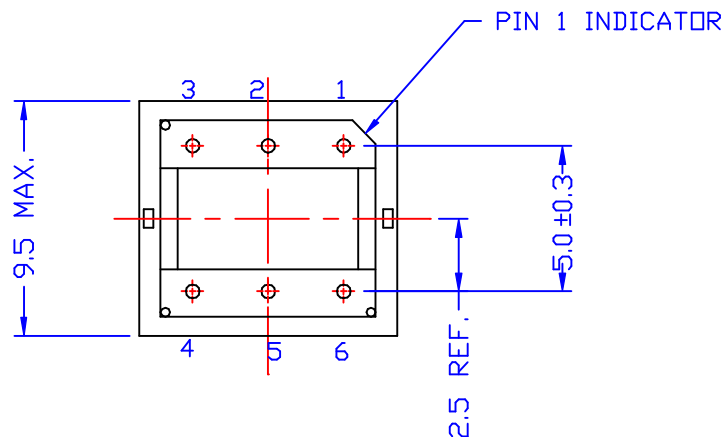
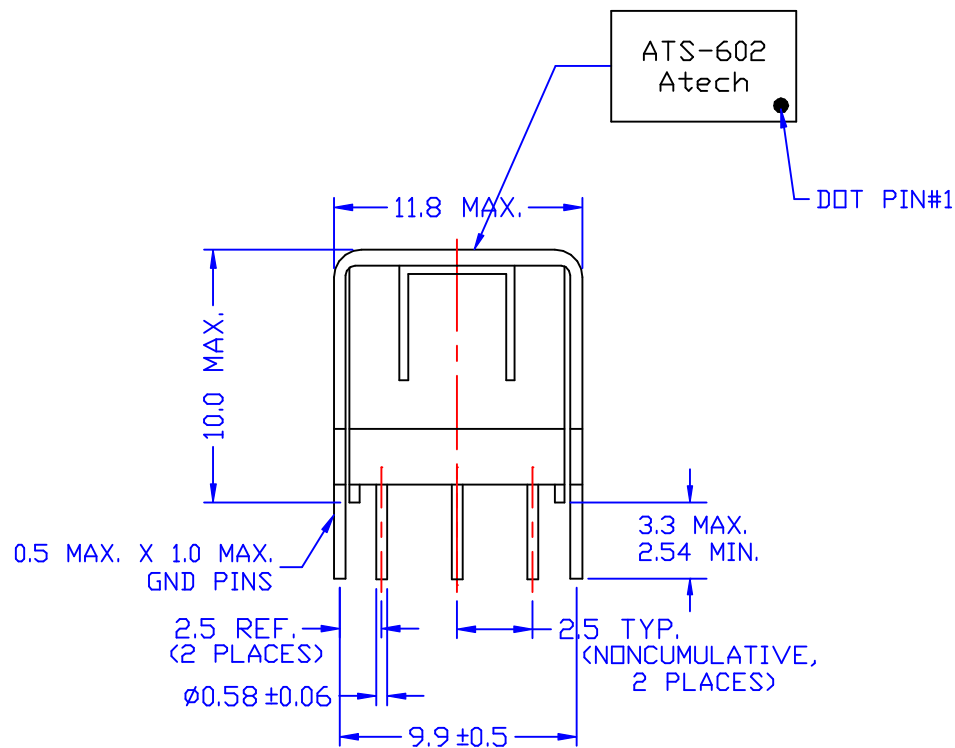


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 0.435 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 409.6uH ± 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 368.64uH MIN.
- TURN RATIO (@840KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 ± 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL: 02/2794-6667 FAX: 02/2794-8004		TITLE: INDUCTOR FOR ISDN/POTS SPLITTER	
								DWG. NO.	
A	TURN RATIO	11/15 /2002	DOLLY	KEVIN	SUEDY	UNITS: M/M		SAFETY	ATS-602
	RELEASE	03/19 /2002	DOLLY	JEFF	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			SHEET OF 1
REVISIONS						03/19/02		DRAW	Pair