
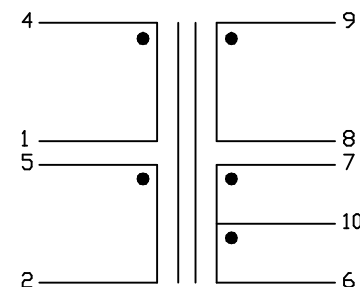
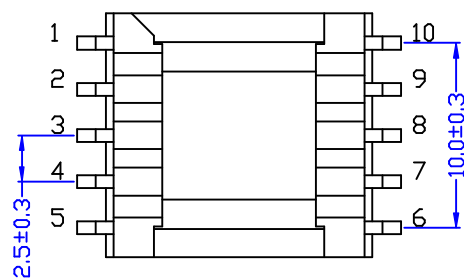
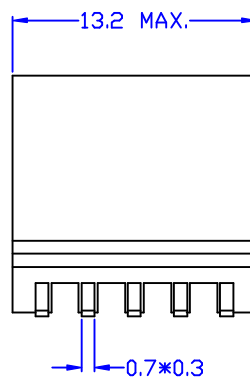


DOT PIN#1

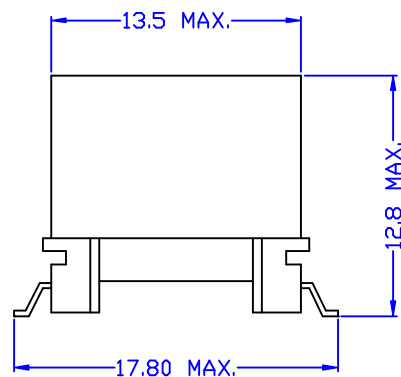

ELECTRICAL CHARACTERISTICS : <B4064 COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 0.07 OHM $\pm$ 12%
PIN 8-9 = 10-7 = 6-10 = 0.04 OHM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 4-2 (1-5 SHORT) = 1.13mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 4-2 (W/H 1-5 8-9 SHORT) = 9uH MAX.
- INTERWINDING CAP. (@10KHZ, 1Vrms) :
PIN 5-6 (W/H 2-4 SHORT) = 20pF MAX.
- TURN RATIO (@4KHZ, 1Vrms) :
PIN 4-2 (1-5 SHORT) : PIN 7-6 = 1.8 $\pm$ 1%
PIN 4-2 (1-5 SHORT) : PIN 9-8 = 3.6 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PIN 1-9 (2-4 7-8 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE VDSL HYBRID TRANSFORMER	
								DWG. NO. ATS-607	
	RELEASE	05/07/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						05/07/02			