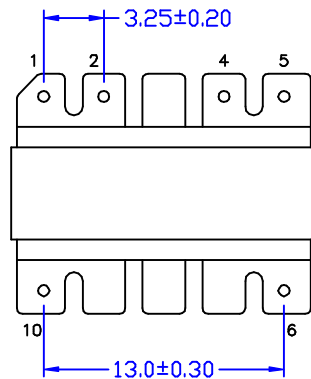
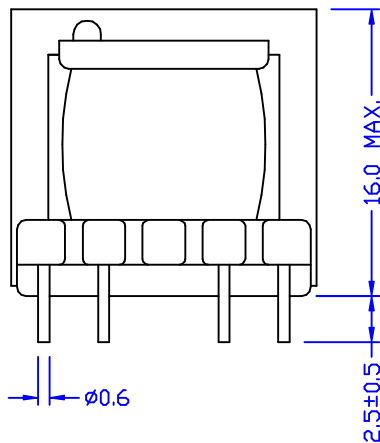
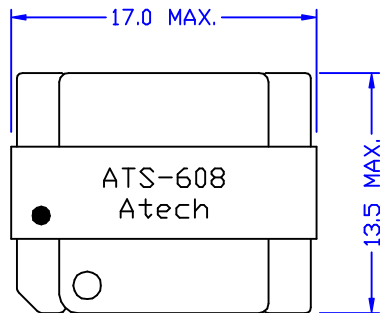


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 4-5 = 63.6 OHM $\pm$ 12%
PIN 6-10 = 53.6 OHM $\pm$ 12%
- INDUCTANCE PARALLEL (@300HZ, 1Vrms) : PIN 6-10 = 260mH MIN.
- I/L (@1KHZ, 0dBm, W/H 45mADC, 2-4 SHORT, 6-10 W/H 600 OHM) :
PIN 1-5 = 2.3dB MAX.
- FREQ. RESP. (@REF 1KHZ) : @300HZ = $\pm$ 3dB
@4KHZ = $\pm$ 1dB
- RETURN LOSS (@REF 600 OHM) : @300HZ = 5dB MIN.
@1KHZ = 10dB MIN.
@4KHZ = 12dB MIN.
- TURN RATIO (@4.5KHZ, 1Vrms) :
PIN 6-10 : PIN 1-5 (2-4 SHORT) = 1 $\pm$ 1%
- HI-POT (@500VAC, 1mA, 1SEC) : PIN 6-1 (W/H 2-4 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 600 TRANSFORMER	
								DWG. NO. ATS-608	
	RELEASE	04/24/2002	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						04/24/02			