
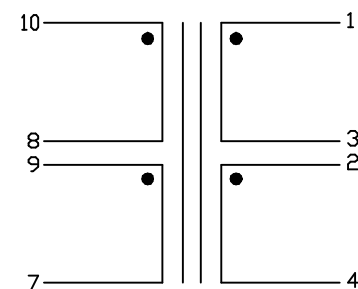
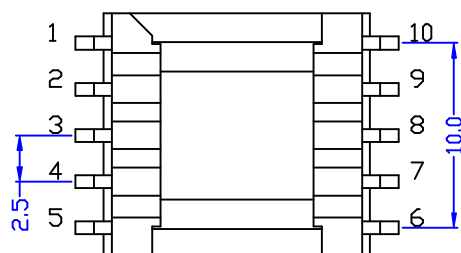
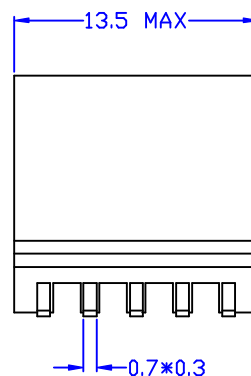


DOT PIN#1

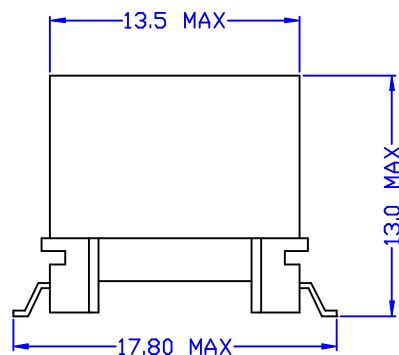

ELECTRICAL CHARACTERISTICS :

(TRTEP13S-U263B013 COMPATIBLE)

- DCR : PIN 1-3 = 480m Ω HM $\pm$ 12%
PIN 2-4 = 620m Ω HM $\pm$ 12%
PIN 7-9 = 8-10 = 2.1 Ω HM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 10-7 (8-9 SHORT) = 5mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-7 (8-9, 1-3, 2-4 SHORT) = 17.5uH MAX.
- THD (@100KHZ, 4Vrms) :
PIN 10-7 (8-9, 2-3 SHORT, 1-4 W/H 16 Ω HM) = -80dB MAX.
- TURN RATIO (@400KHZ, 1Vrms) :
PIN 10-7 : 1-4 (8-9, 2-3 SHORT) = 2.5 $\pm$ 1%
PIN 10-8 : 1-3 = 2.5 $\pm$ 1%
- HI-POT (@1500Vrms, 1mA, 60SEC) : PIN 1-10 (2-3, 8-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE ADSL TRANSFORMER		
								DWG. NO. ATS-609B1		
	RELEASE	11/12/2003	BART	PAIR	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE				DRAW <i>Pair</i>
REVISIONS						11/12/03				