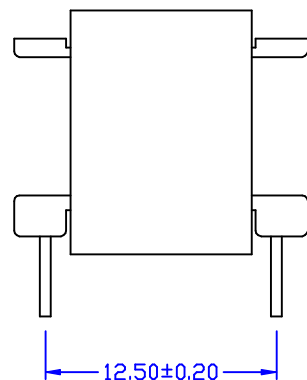
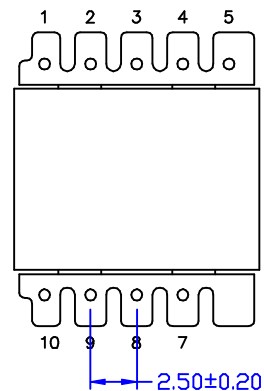
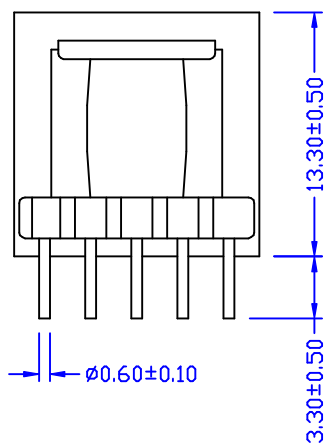
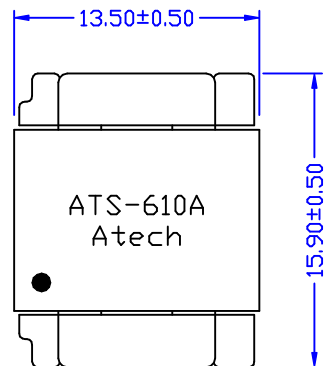


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 2-9 = 4-7 = 7.81 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 2-4 (9-7 SHORT) = 44mH $\pm$ 5%
(@100mADC) : PIN 2-4 (9-7 SHORT) = 39.6mH +12% -0%
3. INDUCTANCE BAL. (@1KHZ, 1Vrms) : PIN 2-9 : PIN 4-7 = 1 $\pm$ 1%
4. TURN RATIO (@50KHZ, 1Vrms) : PIN 2-9 : PIN 7-4 = 1 $\pm$ 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 2-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE INDUCTOR FOR SPLITTER	
							DWG. NO. ATS-610A	
	RELEASE	08/01/2002	DOLLY	JEFF	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						08/01/02		