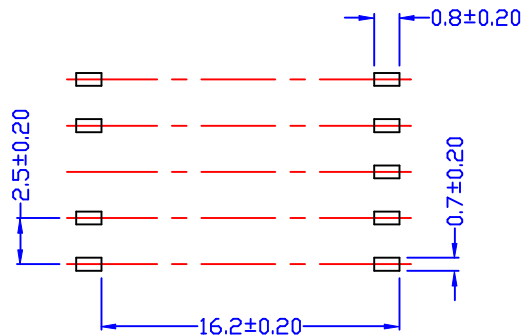
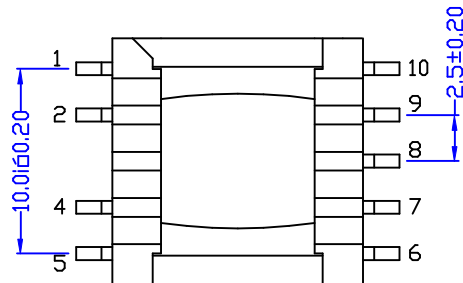
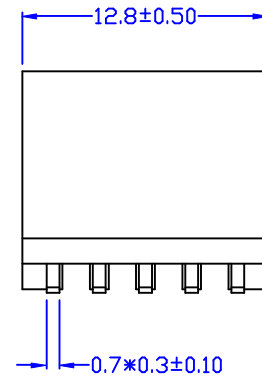
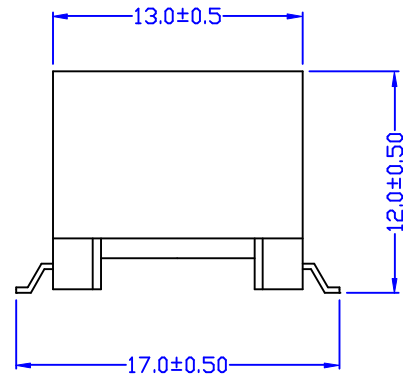
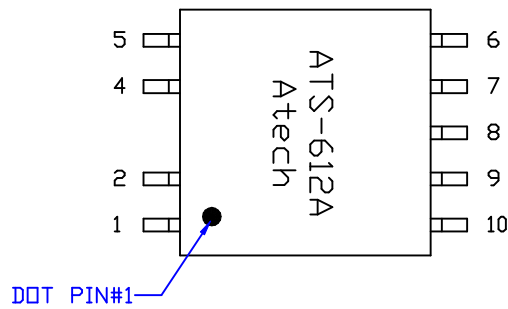


ELECTRICAL CHARACTERISTICS : <50819R COMPATIBLE>

- DCR : PIN 1-4 = 2-5 = 0.86 OHM ± 12%
PIN 10-7 = 9-6 = 0.22 OHM ± 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 409.5uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4 7-9 10-6 SHORT) = 8 +0/-8uH
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-4 7-9 SHORT) = 35 ± 10pF
- TURN RATIO (@1MHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 10-6 (7-9 SHORT) = 2 ± 1%
- HI-POT (@1500VAC, 1mA, 2SEC) :
PIN 1-10 (2-4 7-9 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO.	ATS-612A
A	PIN#3 & stand off CUT	03/24/2003	PAIR	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	05/28/2002	DOLLY	CPLIU	SUEDY			DRAW
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	05/28/02	
REVISIONS								