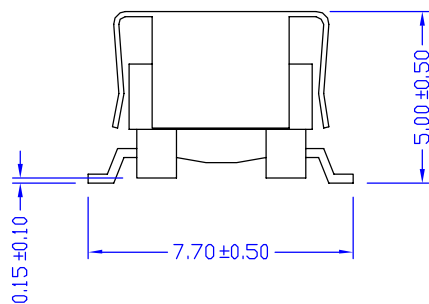
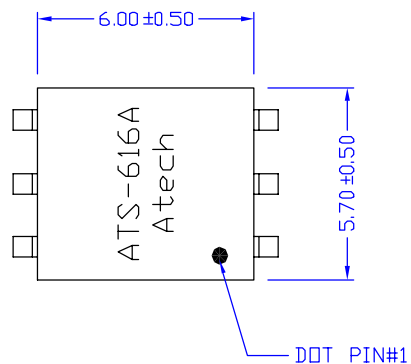


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 4.3 OHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-3 = 4-6 = 240 uH $\pm 5\%$.
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-3 (4-6 SHRT) = 1.3 uH MAX.
4. INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-4 = 350 pF MAX.
5. TURN RATIO (@700KHz, 0.1Vrms) :
PIN 1-3:4-6 = 1 $\pm 1\%$
6. HI-POT (@250VDC, 0.5mA, 2SEC) :
PIN 1-6

					Atech®		TITLE
					Atech Technology Co., Ltd.		INDUCTOR
					TEL:0212794-6667 FAX:0212794-0014		DWG. NO.
							ATS-616A
RELEASE	10/18/2005	BART	LYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	DATE		DRAW
REVISIONS					10/18/05		Pair