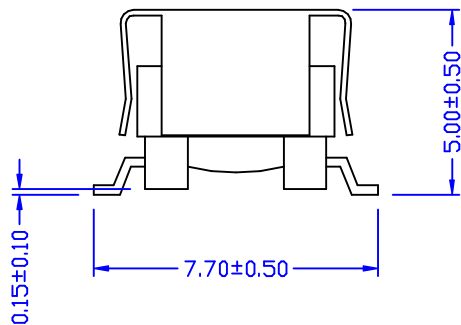
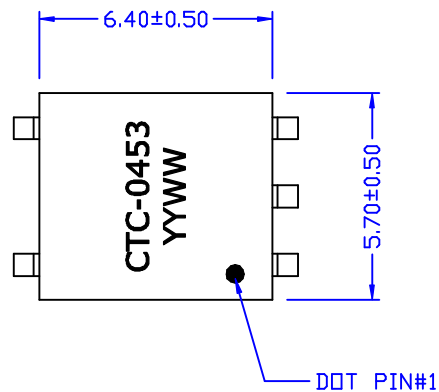


ELECTRICAL CHARACTERISTICS : <50479R COMPATIBLE>

- DCR : PIN 3-2 = 1.37Ω MAX.
PIN 2-1 = 1.61Ω MAX.
PIN 4-6 = 2.6Ω MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 3-1 = 2.2mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 3-1 <4-6 SHORT> : 3.2μ H MAX.
- TURN RATIO (@20KHZ, 0.1Vrms) : PIN 3-1 : PIN 4-6 = $1.1375 \pm 1\%$
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) : PIN 3-4 = 50pF TYP.
- HI-POT (@1.25KVAC, 1mA, 2SEC) : PIN 3-4

					Atech®		TITLE TRANSFORMER		
					Atech Technology Co., Ltd.		DWG. NO.		
					TEL:02-2794-6667 FAX:02-2794-8004		ATS-623C		
	RELEASE	01/17/2003	DOLLY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						01/17/03			Pair