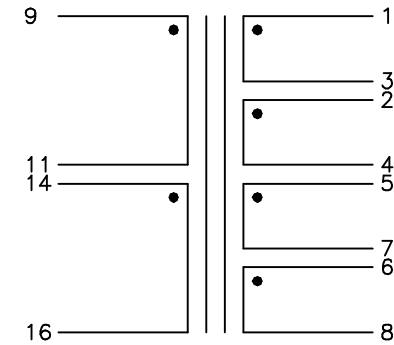
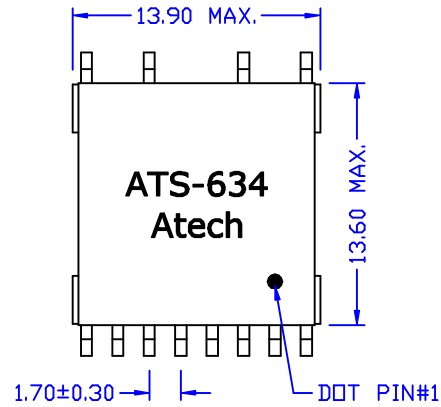


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.15 OHM MAX.
PIN 5-7 = 6-8 = 0.3 OHM MAX.
PIN 9-11 = 14-16 = 1.15 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 9-16 (11-14 SHORT) = 700uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 9-16 (1-3 2-4 5-7 6-8 11-14 SHORT) = 15uH MAX.
- TURN RATIO (@1MHZ, 1Vrms) :
PIN 9-16 (11-14 SHORT) : PIN 1-4 (2-3 SHORT) = 4 ± 3%
PIN 9-16 (11-14 SHORT) : PIN 5-8 (6-7 SHORT) = 2 ± 3%
- HI-POT (@1875VAC, 500uA, 1SEC) : P-S

						Atech® Atech Technology Co., Ltd. TEL:028794-6667 FAX:028794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-634	
	RELEASE	12/23/2002	DOLLY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/23/02			DRAW <i>Patr</i>
REVISIONS									