
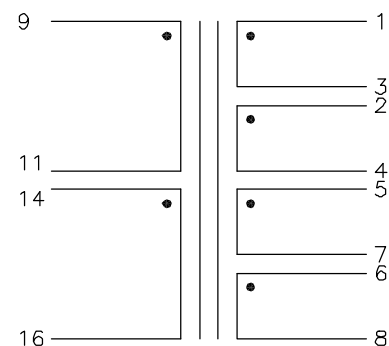
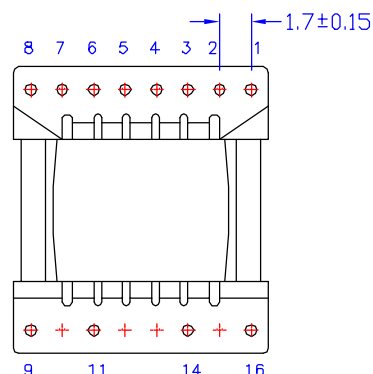
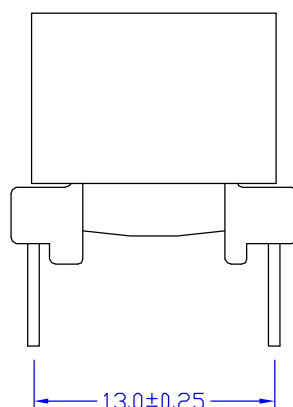
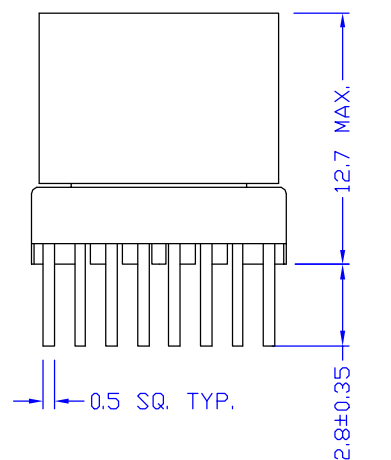


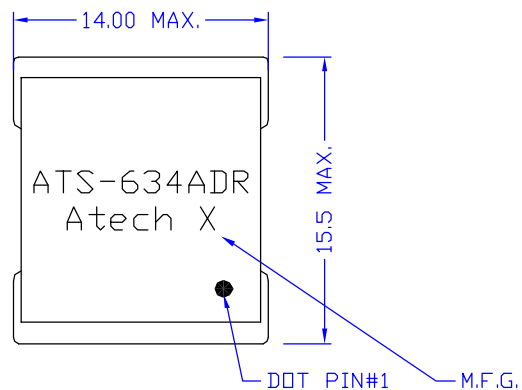

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 94mΩHM ±12%
PIN 5-7 = 6-8 = 130mΩHM ±12%
PIN 9-11 = 14-16 = 310mΩHM ±12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 9-16 (11-14 SHORT) = 700uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 9-16 (1-3 2-4 5-7 6-8 11-14 SHORT) = 10uH MAX.
- TURN RATIO (@800KHZ, 1Vrms) :
PIN 9-16 (11-14 SHORT) : PIN 1-4 (2-3 SHORT) = 4 ± 1%
PIN 9-16 (11-14 SHORT) : PIN 5-8 (6-7 SHORT) = 2 ± 1%
- HI-POT (@1875VAC, 500uA, 1SEC) : P-S
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL HYBRID TRANSFORMER	
								DWG. NO. ATS-634AD	
	RELEASE	08/29/2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						08/29/05			