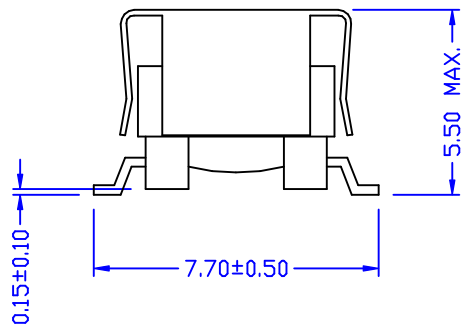
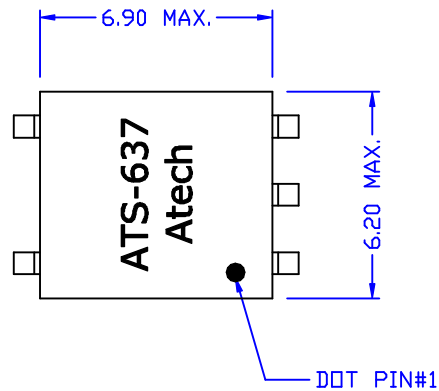


ELECTRICAL CHARACTERISTICS : (50572 COMPATIBLE)

- DCR : PIN 3-2 = 0.9 OHM MAX.
PIN 2-1 = 1 OHM MAX.
PIN 4-6 = 0.8 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 3-1 = 2.3mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 3-1 (4-6 SHORT) : 1.3uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) : PIN 3-4 = 50pF TYP.
- LONGITUDINAL BAL. (@1.5MHZ, 4-6 W/H 17 OHM) = 35dB MIN.
- RETURN LOSS (@4-6 W/H 17 OHM) : @50KHZ-3MHZ = 18dB MIN.
- TURN RATIO (@50KHZ, 1Vrms) : PIN 3-1 : PIN 4-6 = 2.42 ± 1%
- HI-PDT (@1875VAC, 1mA, 1SEC) : PIN 3-4

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-637	
	RELEASE	12/31/2002	DOLLY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/31/02			DRAW Pair
REVISIONS									