
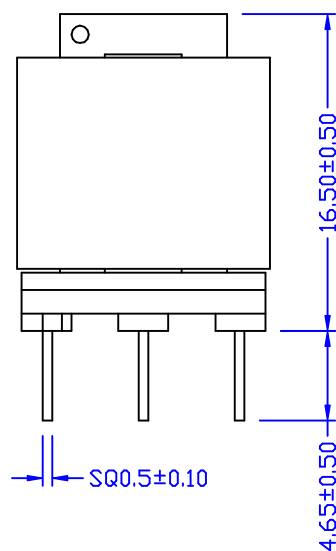
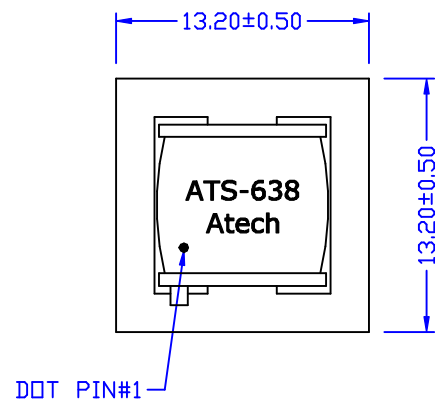


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 4.07 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 24mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 24mH $\pm$ 10%
3. TURN RATIO (@10KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 1%
4. HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE	INDUCTOR
								DWG. NO.	ATS-638
	RELEASE	01/13/2003	DOLLY	KEVIN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	DRAW <i>Patr</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE			