
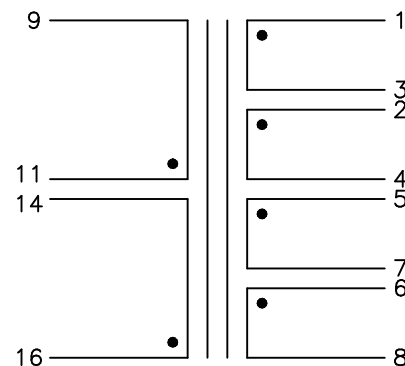
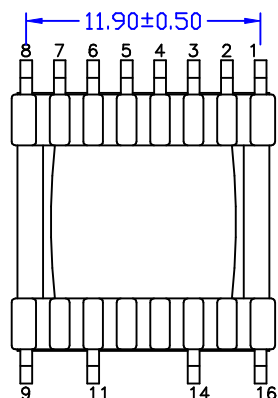
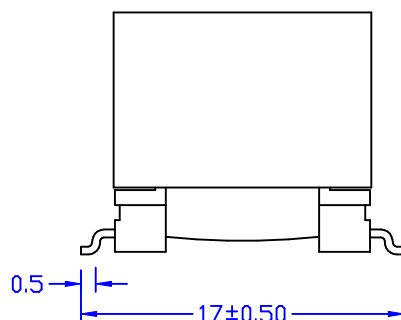



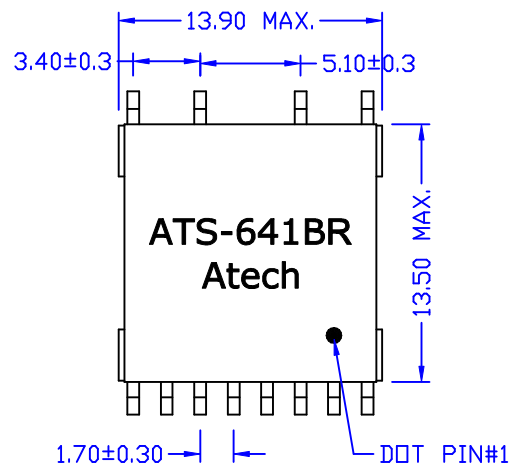

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.31 OHM MAX.
PIN 5-7 = 6-8 = 0.86 OHM MAX.
PIN 9-11 = 14-16 = 0.73 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms W/H 11-14 SHORT) : PIN 9-16 = 700uH ±5%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 9-16 (1-3 2-4 5-7 6-8 11-14 SHORT) = 5uH MAX.
- TURN RATIO
(@ 1.8MHZ, 1Vrms): PIN 16-9 : 1-4 (2-3, 11-14 SHORT) = 4 +/-1%
(@ 10KHZ, 1Vrms), PIN 16-9 : 5-8 (11-14, 6-7 SHORT) = 2 +/-1%
- HI-PDT (@1875Vrms, 1mA, 1SEC) : PIN 1-16 (11-14,3-2,4-5,6-7. SHORT)
- Rohs COMPLIANCE

						Atech®		TITLE ADSL TRANSFORMER	
B	MARKING ADD R	05/19/2006	PAIR	EEFLYS	EUGENE	Atech Technology Co., Ltd.		DWG. NO.	ATS-641BR
A	SPEC.	03/15/2006	PAIR	EEFLYS	EUGENE	TEL:0212794-6667 FAX:0212794-8004			
	RELEASE	03/06/2006	PAIR	KEVIN	EUGENE	UNITS:	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	03/06/06		Pair