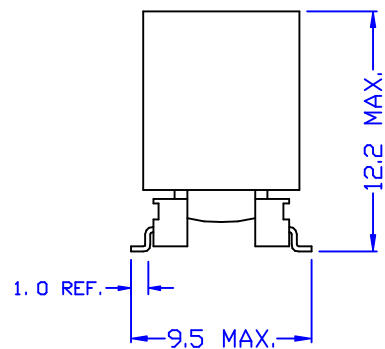



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-3 = 0.40 Ω M $\pm$ 10%
PIN 7-6 = 0.08 Ω M $\pm$ 10%
- INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 2-3 = 220uH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 2-3 (7-6 SHORT) = 5uH MAX.
- INTERWINDING CAP. (@80KHZ, 0.1Vrms) :
PIN 2-7 = 35pF MAX.
- INSERTION LOSS (@1MHZ, 0dBm) :
PIN 2-3 (7-6 W/H 11 Ω M) = 0.5 dB MAX.
- LOGITUDINAL BAL. (80KHZ - 2MHZ) = 45dB MIN.
- THD (@100KHZ, 4Vrms) :
PIN 2-3 (7-6 W/H 11 Ω M) = -75dB MAX.
- TURN RATIO (@1.5MHZ, 1Vrms) :
PIN 2-3 ; 7-6 = 3 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC) : PIN 2-7

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-642	
	RELEASE	04/04/2003	RORY	KEVIN	SUEDY			UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW <i>Pair</i>		
REVISIONS						04/04/03			