

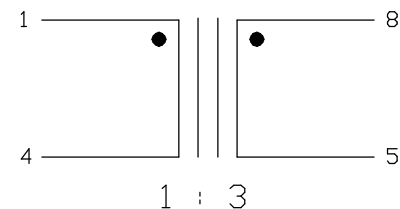
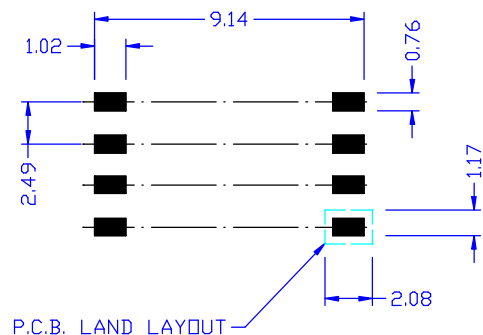
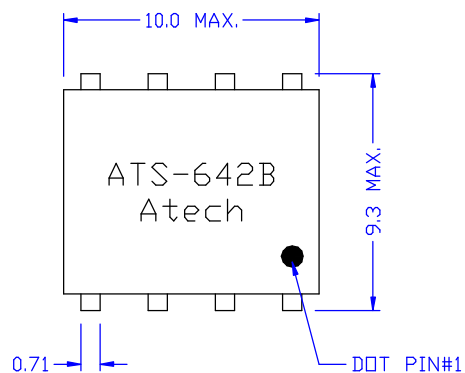


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 0.2 Ω MAX.
PIN 8-5 = 1 Ω MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 8-5 = 200uH +/- 10%
- LEAKAGE INDUCTANCE (@80KHZ, 0.1Vrms) :
PIN 8-5 (1-4 SHORT) = 2uH MAX.
- INTERWINDING CAP. (@80KHZ, 0.1Vrms) :
PIN 1-8 = 40pF MAX.
- INSERTION LOSS (@0dBm, 1MHZ) :
PIN 8-5 (1-4 W/H 11 Ω) = 0.5 dB MAX.
- THD(@80KHZ, 2.5Vrms) :
PIN 8-5 (1-4 W/H 11 Ω) = -75dB MAX.
- TURN RATIO (@2MHZ, 1Vrms) :
PIN 8-5 : 1-4 = 3 +/- 1%
- HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC

					Atech®		TITLE TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO.	
					TEL: (02) 2794-6667 FAX: (02) 2794-8004		ATS-642B	
RELEASE		08/12/2003	RDY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						08/12/03	Pair	